



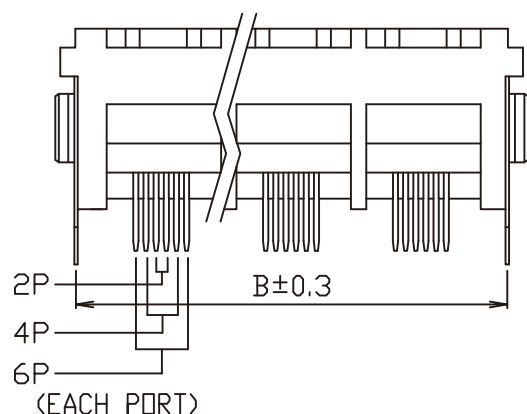

MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER,
STANDARD ODDOR-GARY,
CONTACTS-0.45mm DIAMETER PHOS-BRONZE
PLATED WITH HARD GOLD,
MTEAL PEG-0.50mm THICK PHOS-BRONZE
PLATED WITH TIN/LEAD,
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

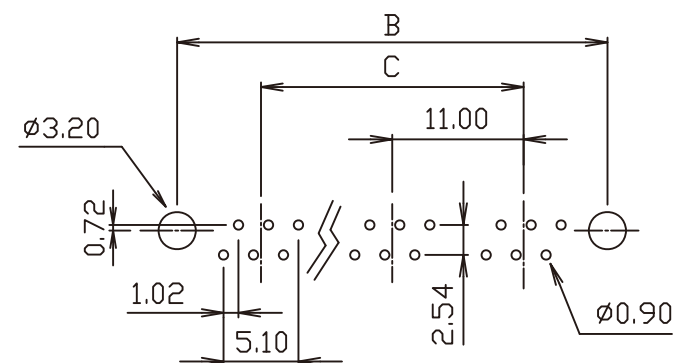

PC Board Layout

DIMENSION	NO. OF JACK							
	1	2	3	4	5	6	7	8
A	17.00	28.00	39.00	50.00	61.00	72.00	83.00	94.00
B	13.8	24.8	35.8	46.8	57.8	68.8	79.8	90.8
C	0	11.00	22.00	33.00	44.00	55.00	66.00	77.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE _____

PROJECTION — 

X. $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.13
 .XXX $\pm$ 0.05
 ANG $\pm$



ORDER INFORMATION

MJD15Ax-GE06Z-0606-LF

SERIES

2:2 PORTS

8:8 PORTS

III

[illegible]

0

| EAR
CRAY

LEADFREE

5C

D

DESCRIPTION: 6POSITION TOP ENTRY PCB
GANGED JACK FROM 2 PORTS THRU 8 PORTS