
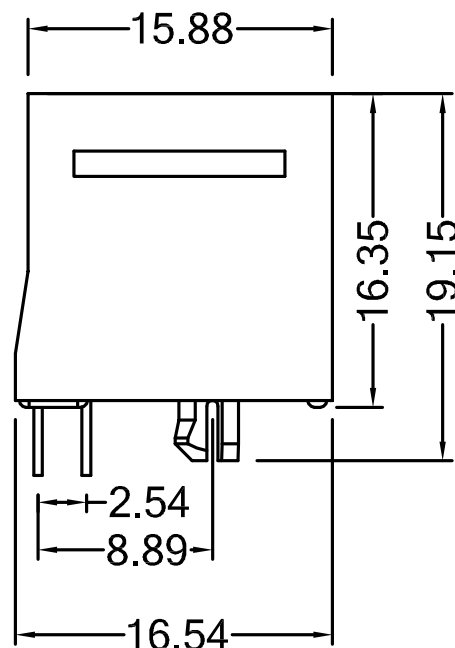
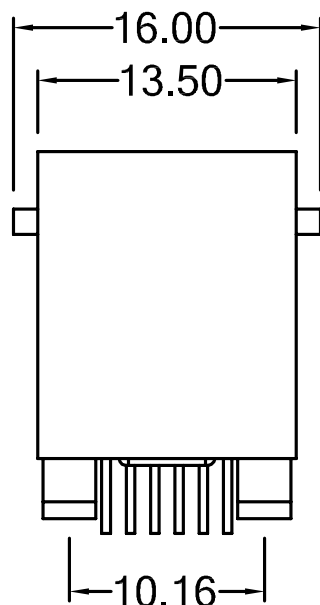
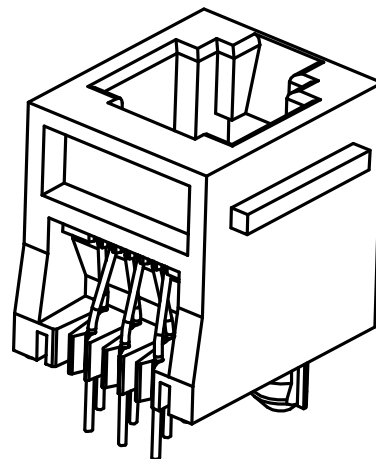





MATERIAL & FINISH

Housing: PBT. UL94V-0, black
 Conductor: 0.45 mm diameter phosphor bronze,
 Plating: Gold plated over nickel
 Temperature: -40°C to +70°C
 Durability: 750 cycles min.

ELECTRICAL

Voltage Rating : 125 V
 Current Rating : 1.5 A
 Contact Resistance : 30 milliohms max.
 Insulation Resistance : 500 megaohms min.
 Dielectric Withstanding Voltage : 1000 V

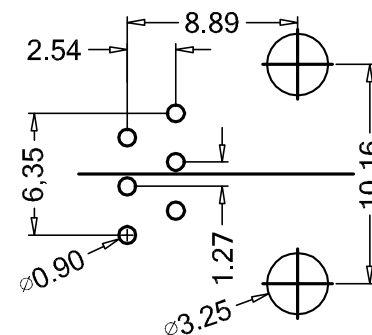

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJD16-KE06D4-0606-LF

SERIES

16

KE

06

D4

06

06

LF

6P6C

DIA 0.45Ø

06u" GOLD

EAR

BLACK

LEADFREE

DESCRIPTION: