
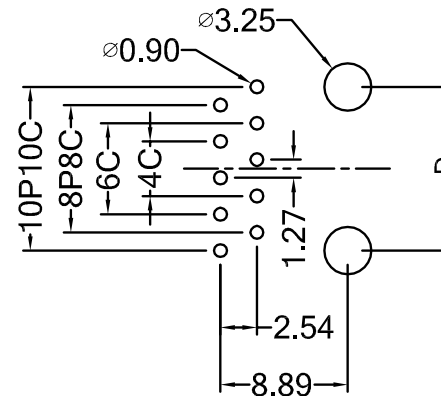


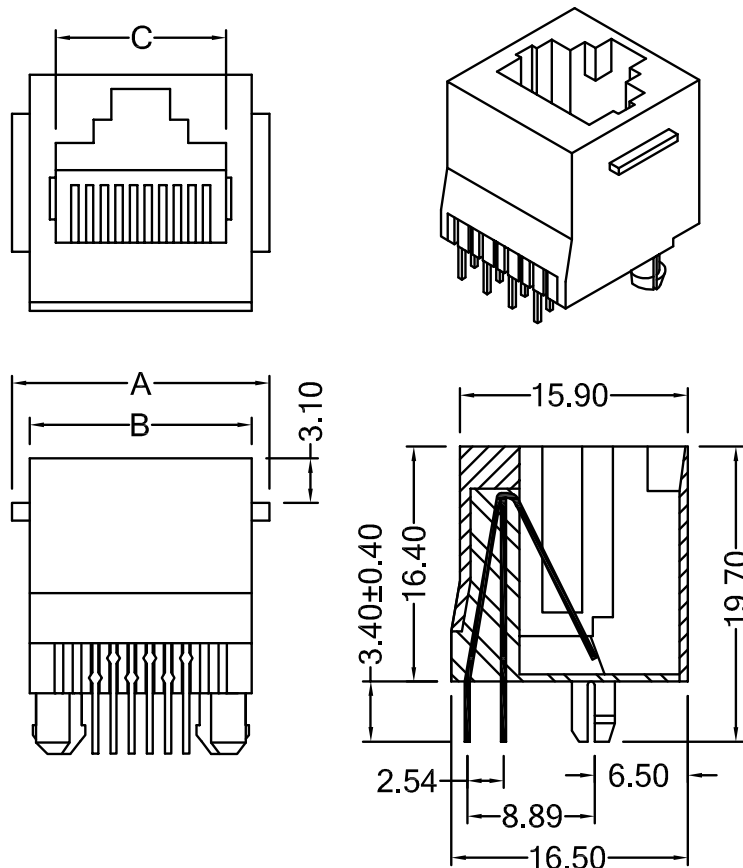

PCB LAYOUT / TOP VIEW

position	contact	A	B	C	D
4P	4C	13.80	11.40	7.90	7.62
6P	2C/4C/6C	15.80	13.45	10.00	10.16
(8P)6P	4C/6C	18.00	15.50	10.00	11.43
8P	4C/6C/8C	18.00	15.50	11.90	11.43
10P	10C	18.00	15.50	11.90	11.43

UNIT: m / m
TOL.: +/- 0.15

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black or gray
Conductor: 0.35 × 0.42 mm thickness phosphor bronze,
Plating: Gold plated over nickel on contact area,
Tin plated over nickel on solder area.
Temperature: -40°C to 85°C
Durability: 750 cycles min.

ELECTRICAL

Voltage Rating : 125 V
Current Rating : 1.5 A
Contact Resistance : 30 milliohms max.
Insulation Resistance : 500 megaohms min.
Dielectric Withstanding Voltage : 1000 V

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJD16-KE06T3-xxxx-LF

SERIES

LEADFREE

0404:4P4C

1010:10P10C

BLACK
EAR

0.35t
6u" GOLD

DESCRIPTION: