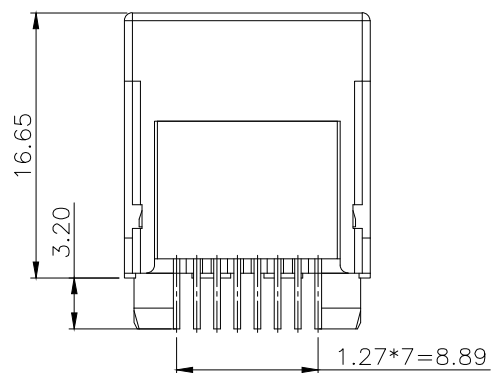



Electrical:
 1.Voltage Rating:125 Vac Rms.
 2.Current Rating:1.5 Amp.
 3.Contact Resistance:40 Milliohms Max.
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:
 1.Operating:750 Cycles Min.

Environmental:
 1.Storage:-40°C To +85°C.
 2.Operation:-20°C To +75°C.
 Mates With Modular Plug Conforming
 To FCC Part 68, Subpart F.


Materials:

Plastic Housing: Engineering Thermoplastic
 Flammability Rating UL 94V-0.

Contacts: Thickness Phosphor Bronze

Plating: Gold Plating Over Nickel In Contact.

PCB LAYOUT/TOP VIEW

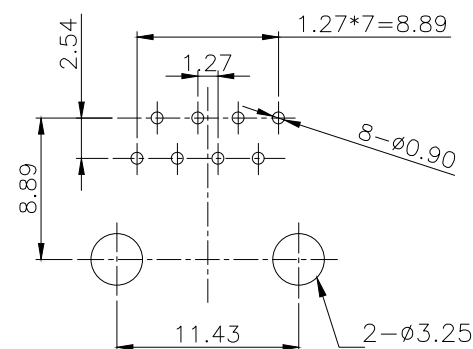

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.10
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MJD16C5E-KXxx-0808-LF

SERIES

8P8C

LEADFREE

BLACK

06:06u" GOLD

15:15u" GOLD

30:30u" GOLD

NON EARS

DESCRIPTION: CAT.5E