
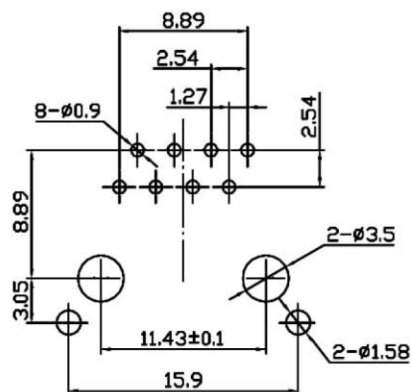
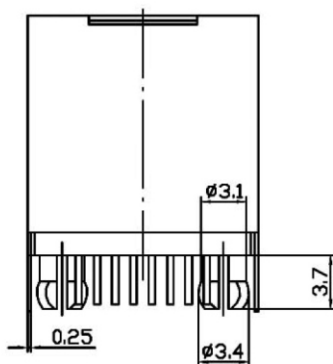
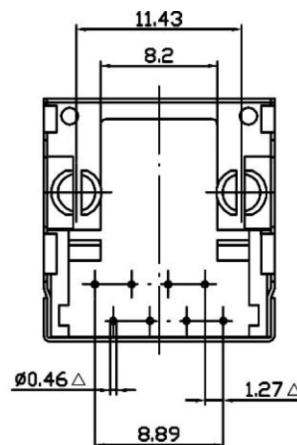
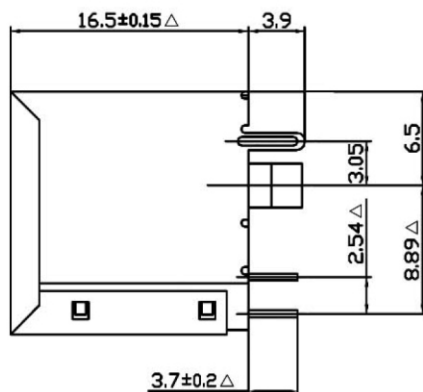


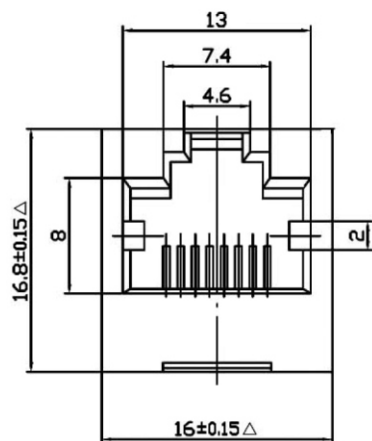

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125VAC RMS.
2. CURRENT RATING:1.5AMP.
3. CONTACT RESISTANCE:42MILLIOHMS MAX.
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH:1000 VDC RMS 60HZ. 1MIN.

MECHANICAL:

1. HOUSING MATERIAL:NYLON , UL94V-0.
2. CONTACT MATERIAL:PHOSPHOR BRONZE ϕ 0.46mm.
3. PLATING:GOLD PLATING OVER NICKEL.
4. OPERATING LIFE:250 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER:1 LB MIN.
6. PCB RETENTION POST-SOLDER:10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE:-40°C TO 85°C.
2. OPERATION:0°C TO 70°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJDF16-KX03A3-0808-LF

SERIES

8P8C

LEADFREE

FRONT TAB 3.05mm

03u" GOLD

NON EAR

BLACK

DESCRIPTION: