



MATERIAL: HOUSING-PBT POLYESTER UL-94V-0  
 MIXED GLASS FIBER.  
 STANDARD COLOR-BLACK  
 CONTACTS-0.35mm THICK PHOS-BRONZE  
 PLATED WITH HARD GOLD AND  
 TIN/LEAD IN SOLDER AREA.  
 SHIELD-0.25mm THICK COPPER ALLOY,  
 PLATED WITH TIN/LEAD.  
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

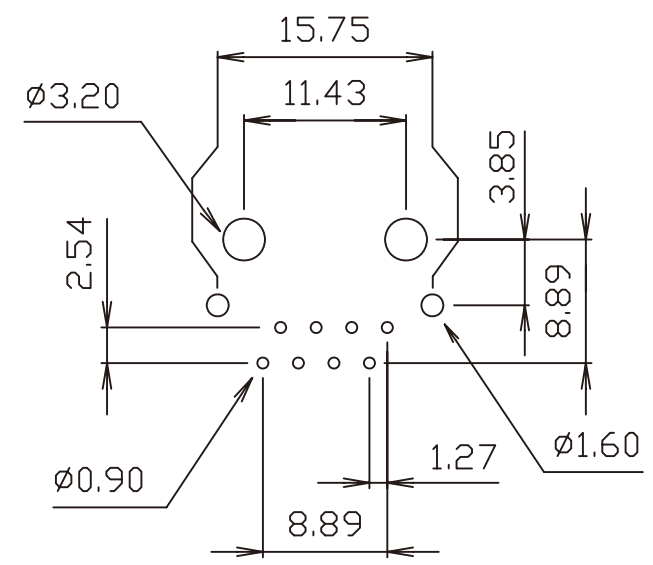

PC Board Layout

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

<b>RoHS Compliant</b>		TOLERANCES ARE	
DRAWING BY CY		X. ±	
CHECKED BY GENIUS		.X ± 0.25	
UNIT/ mm	SCALE 1:1	.XX ± 0.13	
DATE		.XXX ±	
SIZE A4	P PROJECTION	ANG ±	



**ORDER INFORMATION**  
 MJDF16-KX06B38-0808-LF  
 SERIES | | | | LEADFREE  
 | | | | REAR TAB 3.85mm  
 | | | | 8P8C  
 | | | | 06u" GOLD  
 | | | | NON EARS  
 | | | | BLACK

DESCRIPTION: 8POSITION FLAT PIN SHIELDED TOP ENTRY PCB JACK