
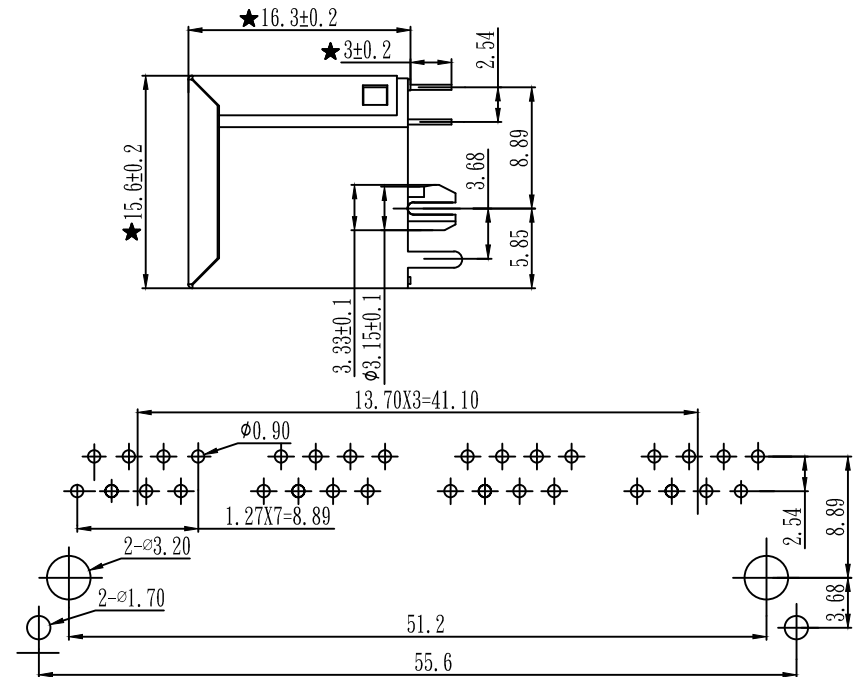


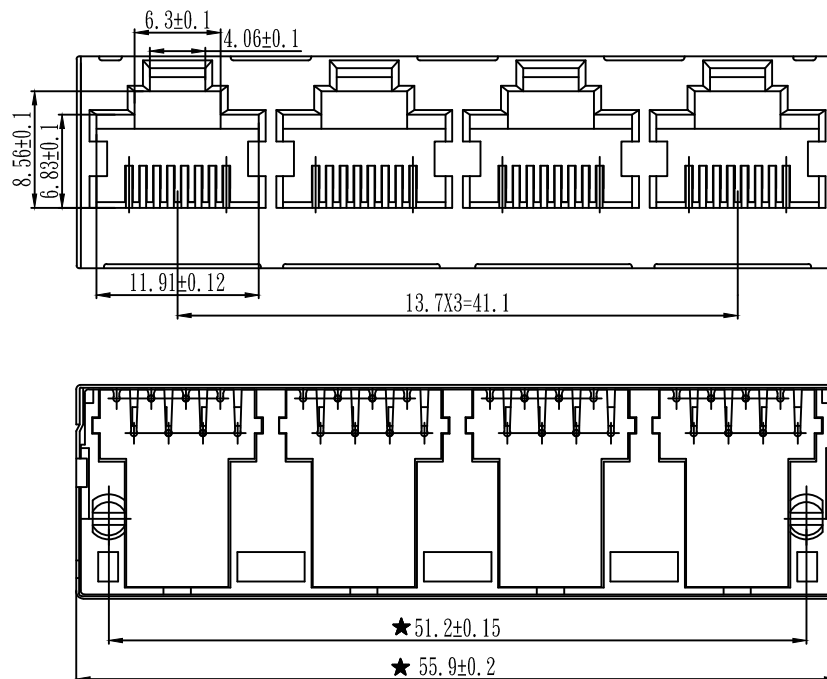

PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS.
2. CURRENT RATING:1.5 AMP.
3. CONTACT RESISTANCE:30 MILLIOHMS MAX.
4. INSULATION RESISTANCE:500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH:1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL:PA46 UL94V-0.
2. CONTACT MATERIAL:DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD:0.20 ~ 0.25MM THICKNESS BRASS WITH NICKEL PLATED.
4. MATING/UNMATING FORCE:2.2KG. F MAX.
5. RETENTION STRENGTH:7.7KG. F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE:-40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION:-40℃ ~ +85℃.

Remark:

The mark with ★ is the key inspection dimension for QC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJDF16A4-KXxxA36-0808-LF

SERIES

8P8C

LEADFREE

FRONT TAB 3.68mm

BLACK

01:G/F

06:06u" GOLD

NON POST

DESCRIPTION: