
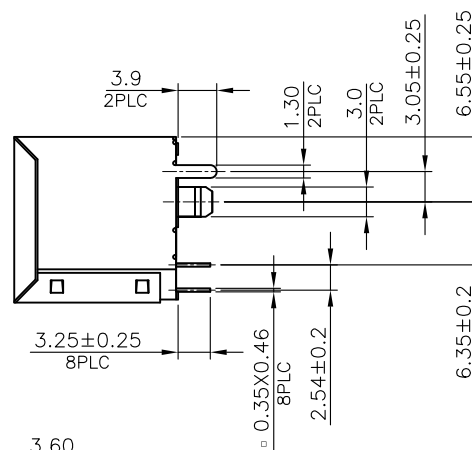

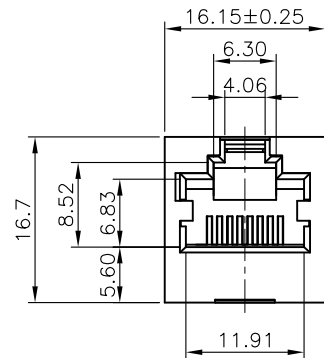
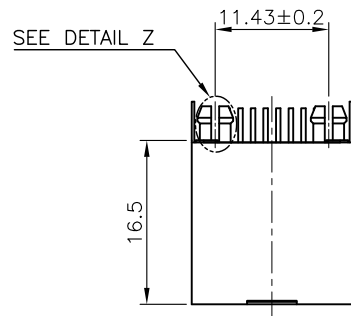


DETAIL Z
SCALE 2:1

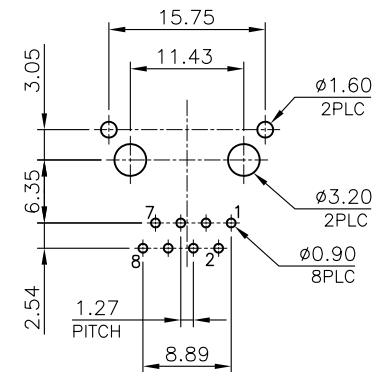

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.
- 1.4 SHELL: BRASS.

2. FINISH:

- 2.1 CONTACTS: 1.27μm [50μ"] GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 0.152μm [6μ"] MIN. NICKEL UNDERPLATED OVERALL
- 2.2 SHELL: 0.508μm [20μ"] MIN. NICKEL PLATED.

3. CAT 5e

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJDF16C5-KX06A3-0808-LF

SERIES

BLACK

LEADFREE

8P8C

FRONT TAB 3.05mm

06u" GOLD

NON EAR

DESCRIPTION: RJ45, WITH SHELL, FLAT PIN, TOP ENTRY PCB JACK