
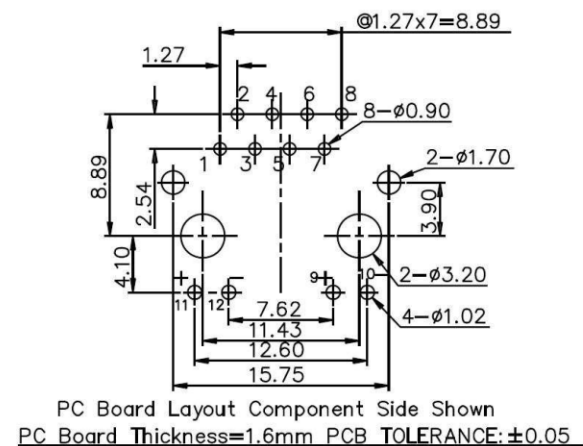
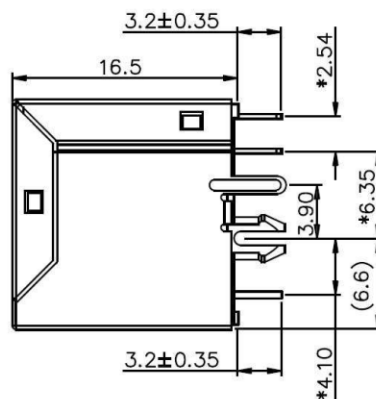



# 一、Mechanical Dimensions

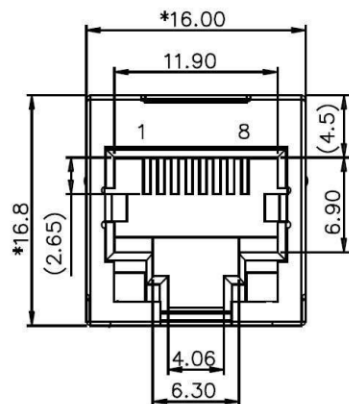

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ± 0.35  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

MJDF16L-KX06B39GYGY-0808

SERIES

8P8C

BLACK  
NON EAR

LEFT

GREEN / YELLOW

RIGHT

GREEN / YELLOW

06u" GOLD

REAR TAB 3.90mm

DESCRIPTION: 1X1 180° LED Jack, STP-Behind 3.90mm-W/O Tabs

二、 ELECTRICAL

- 1. VOLTAGE RATING:125 VAC RMS.
- 2. CURRENT RATING:1.5 AMP.
- 3. CONTACT RESISTANCE:30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE:1000 MEGOHMS MIN@500 VDC.
- 5. DIELECTRIC STRENGTH:1000 VDC RMS 60Hz,1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL: NYLON UL94V-0.
- 2. CONTACT MATERIAL:PHOSPHOR BRONZE t=0.35mm.
- 3. PLATING:GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE:750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER:1 LB MIN.
- 6. PCB RETENTION POST-SOLDER:10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE:-40℃ TO +85℃.
- 2. OPERATION:-40℃ TO +85℃.
- 3. WAVE SOLDERING TEMPERRATURE:250~260℃(50~10SECONDS)
- 4. RoHS compliance:YES

MATES WITH MODULAR PLUG CONFORMING  
TO FCC PART 68,SUBPARTF.

三、 Part Number



| Standard LED | Wavelength | Forward* V(MAX) | TYP  |
|--------------|------------|-----------------|------|
| Green        | 565nm      | 2.5v            | 2.2v |
| Yellow       | 585nm      | 2.5v            | 2.1v |

With a forward current of 20mA

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.35  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 5°

照片框

ORDER INFORMATION

MJDF16L-KX06B39GYGY-0808

SERIES

8P8C

BLACK  
NON EAR

GREEN / YELLOW  
REAR TAB 3.90mm  
06u" GOLD

RIGHT

GREEN / YELLOW

DESCRIPTION: 1X1 180° LED Jack, STP-Behind 3.90mm-W/O Tabs