
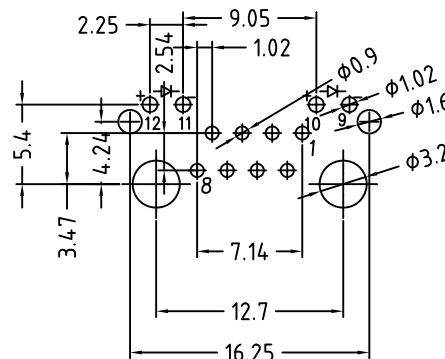


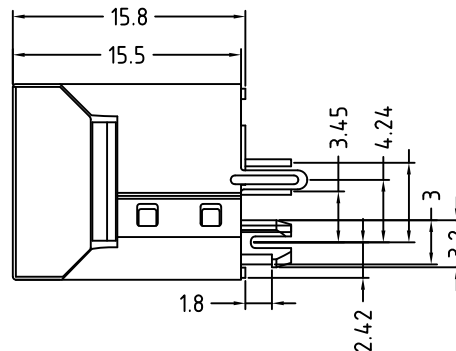


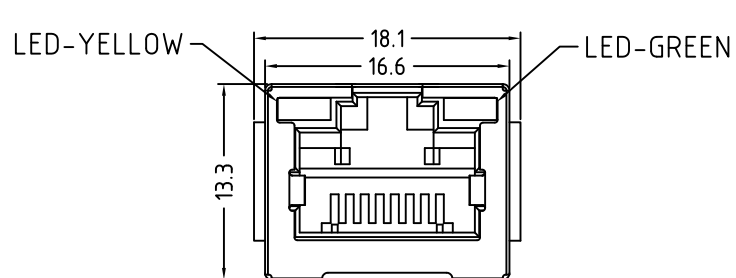

SUGGESTED PCB LAYOUT
(TOP VIEW)

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT/PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING $50\mu\text{m}$ OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MJDFUL-KE06B4YG-0808-LF

SERIES

LEADFREE

8P8C

YELLOW / GREEN

REAR TAB 4.24mm

BLACK 06u" GOLD

EAR

DESCRIPTION: