
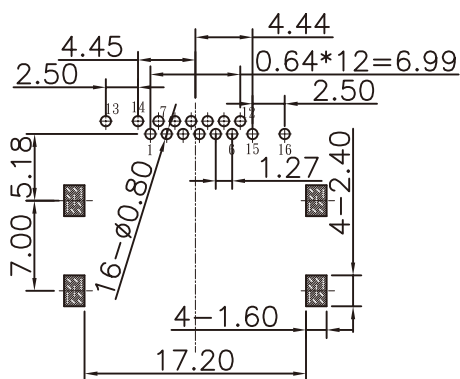
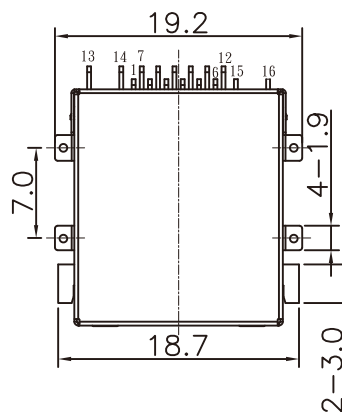
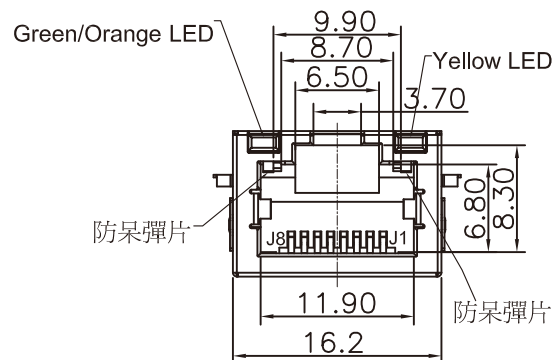
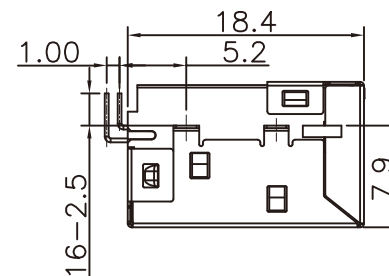



以此塑膠擋塊
及銅殼腳為基準

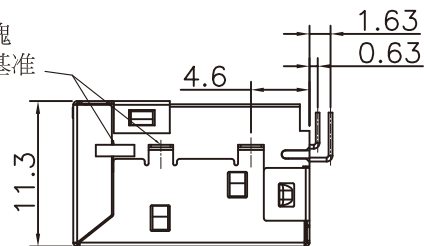

RECOMMENDED PCB LAYOUT
TOLANCE $\pm 0.05\text{mm}$

NOTES:

1.MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC.(LCP)
- UL94V-0 COLOR:BLACK
- 1.2 CONTACTS: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

2. FINISH:

2.1 CONTACT:

- 6u"MIN. GOLD PLATING ON CONTACT AREA.
- 100u"MIN. TIN PLATING ON SOLDER TAILS.
- 50u"MIN. NICKEL UNDERPLATING OVERALL.

2.2 SHELL:

- 50u"MIN. NICKEL UNDERPLATING OVERALL.

3. RECOMMENDED PCB THICKNESS: 1.6mm

4. REFLOW SOLDER CAPABLE TO 260°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

照片框

ORDER INFORMATION

MJF08-KX06E2GOYX-0808-LF

SERIES

BLACK

EAR

06u"GOLD

NON EAR

8P8C

GREEN/ORANGE

/ YELLOW



LEADFREE

DESCRIPTION: RJ45 1x1 Dip GIGA through hole with LED 6u" NS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

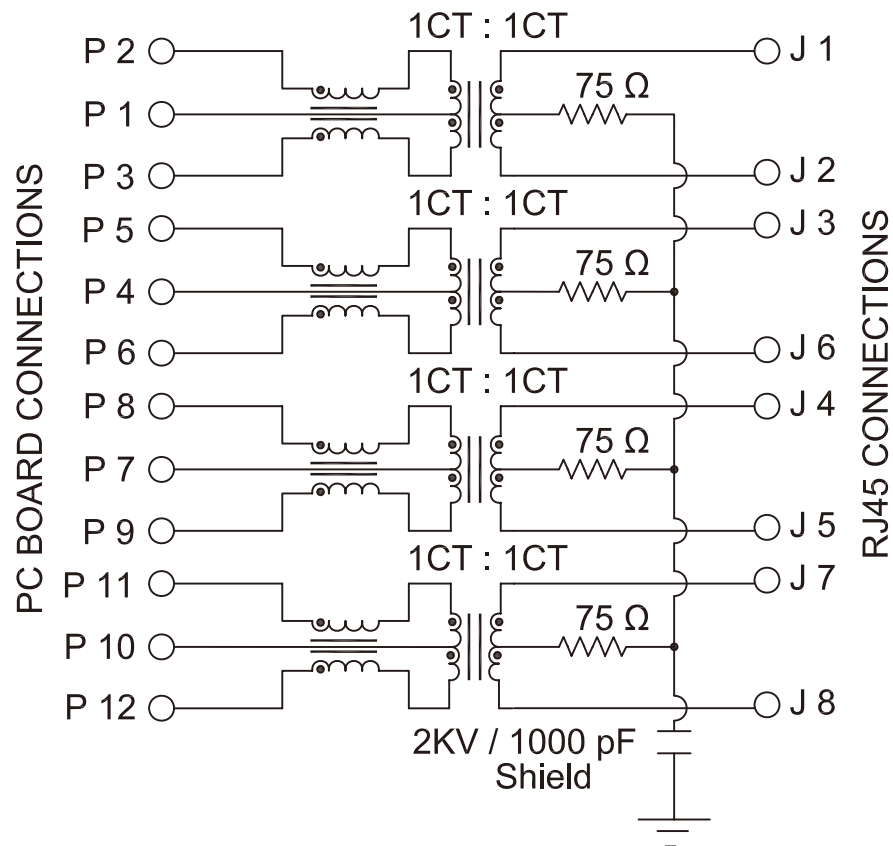

1. Electrical Specification @25°C:

- 1.1 Insertion Loss: @ 1-100 MHz -1.0dB Max.
Return Loss: @ 1-30 MHz -18dB Min. LOAD 100 Ω.
@ 30-60 MHz -16dB Min. LOAD 100 Ω.
@ 60-80 MHz -12dB Min. LOAD 100 Ω.
- 1.2 Common Mode Rejection : @ 1-100 MHz -30dB Min.
- 1.3 Cross Talk: @ 1-100 MHz -30dB Min.
- 1.4 Inductance @100KHz/0.1V 350uH Min 8mA DC bias .
- 1.5 Hi-Pot Test: 1500AC, 1sec .

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MJF08-KX06E2GOYX-0808-LF

SERIES

BLACK

EAR
06u" GOLD

NON EAR

8P8C
GREEN/ORANGE / YELLOW

LEADFREE

DESCRIPTION: RJ45 1x1 Dip GIGA through hole with LED 6u" NS