

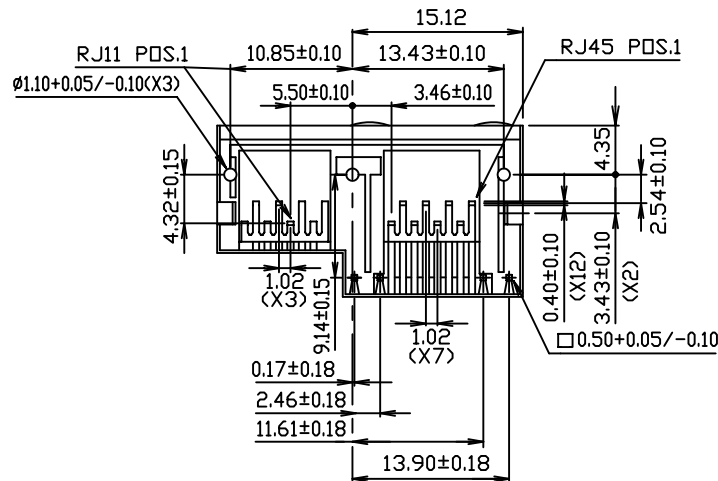
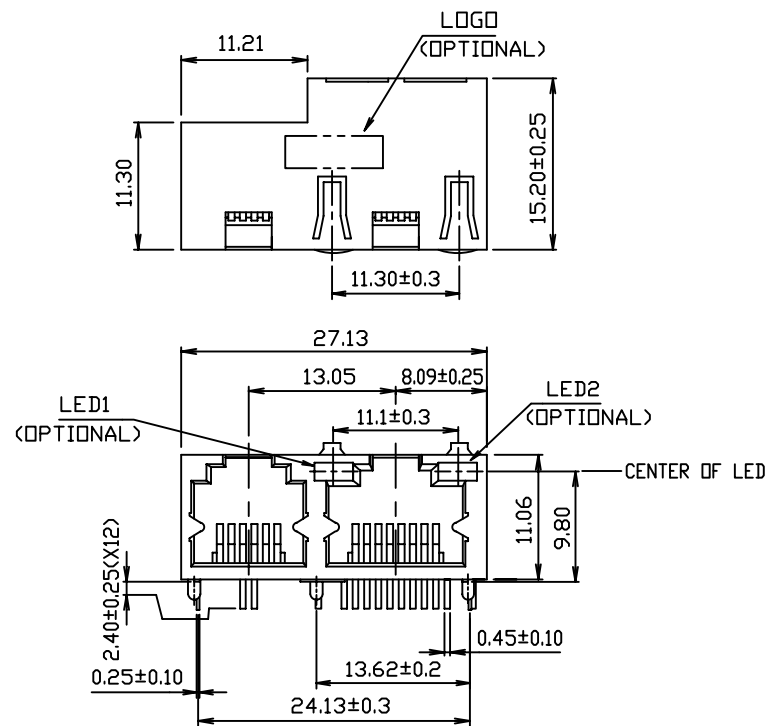



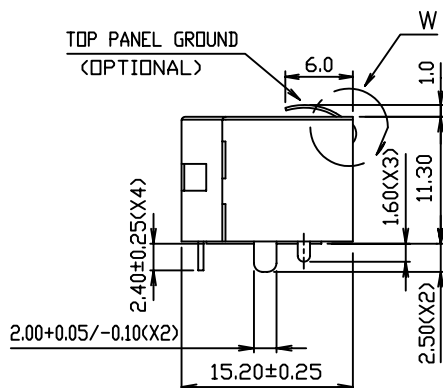

- MATERIALS:**
- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR,UL94V-0
 - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD IN
SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

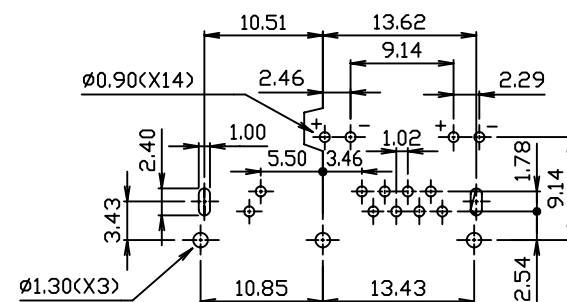

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJF11ULA2-KT06A25xx-6288-LF

SERIES

BLACK

TOP SPRING

06u" GOLD

FRONT TAB 2.54mm

GY:GREEN/YELLOW

YG:YELLOW/GREEN

LEADFREE

6P2C/8P8C

6288-LF

DESCRIPTION: RJ45 & RJ11 SIDE BY SIDE RECEPTACLE CONNECTOR