
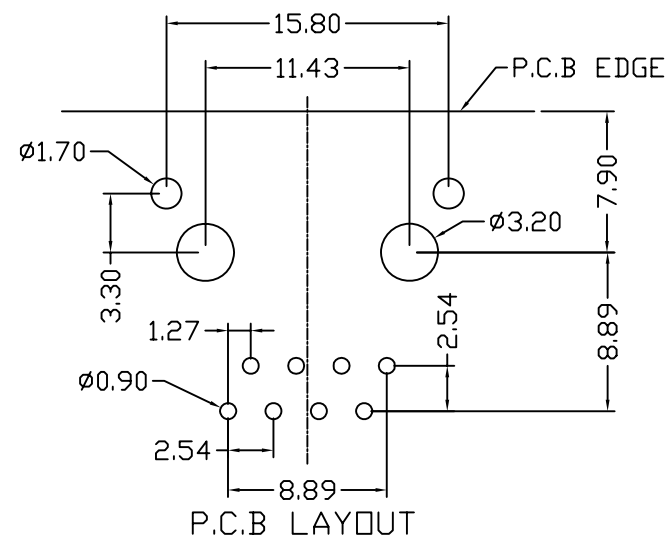
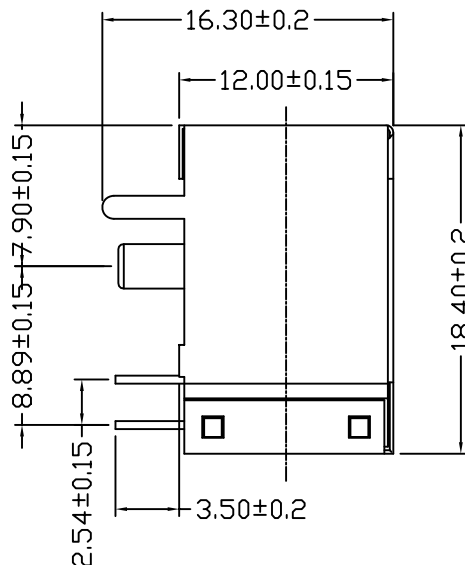
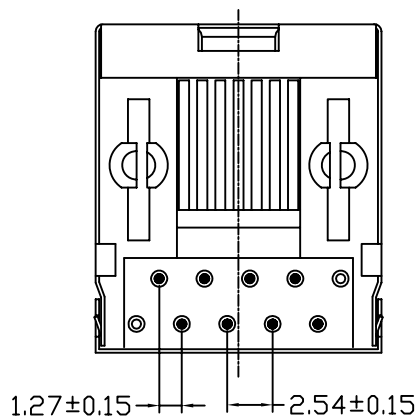
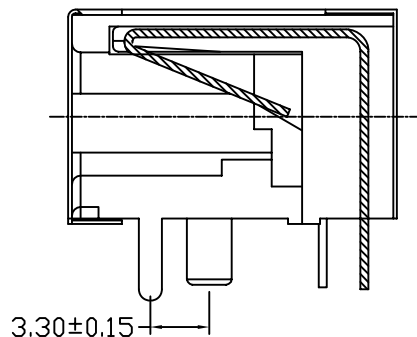


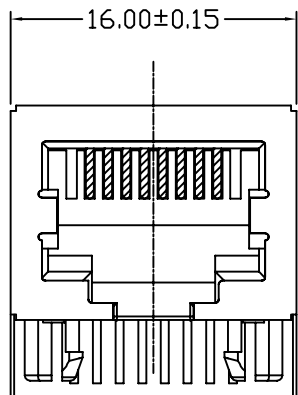

# SPECIFICATION:

## Electrical:

Current Rating:1.5Amp max @25°C

Voltage Rating:150VAC max

Insulation Resistance:500 megohms min

Contact Resistance:30 milliohms max

Withstanding Voltage:1000 VAC

## Mechanical:

Durability:750 Cycles

Operating Temperature:-40°C~+85°C

Contact Normal Force:100g Minimum

## Material:

Housing:High Temperature Thermoplastic

Black UL94V-0

Shield: Thickness Copper

Alloy Tin/Ni Plated

Contact:0.45mm Dia Phosphor Bronze

Plated Gold Over Ni

## RoHS Compliant

## TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±

.X±

.XX±

.XXX±

ANG ±

照片框

## ORDER INFORMATION

MJF12-KX06A33-0808-LF

SERIES LEADFREE

8P8C

FRONT TAB 3.30mm

BLACK 06u" GOLD

NON EARS

DESCRIPTION:8POSITION SIDE ENTRY VERY LOW PROFILE, SHIELDED PCB JACK