


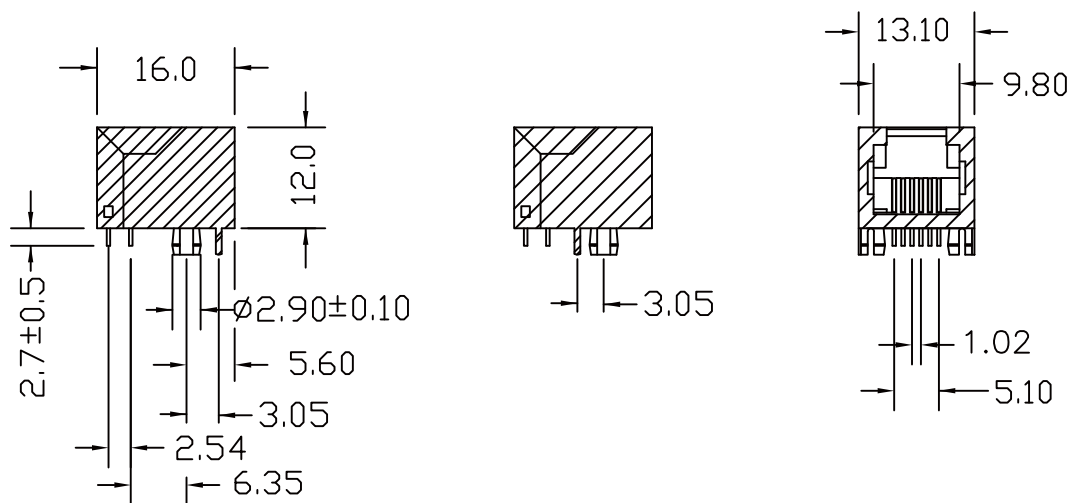


SPECIFICATIONS

MATERIAL:


1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.20mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

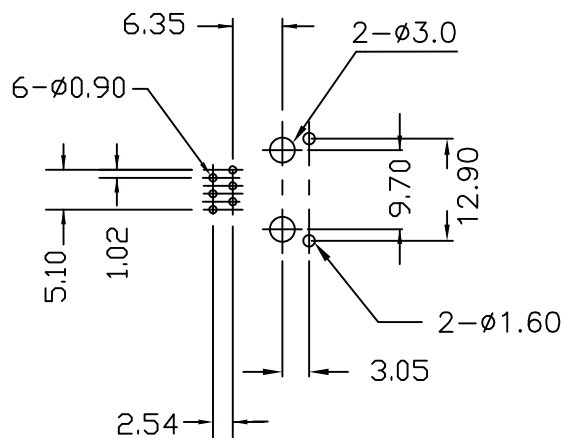

PCB LAYOUT/TOP VIEW
MJF12-KX06A3-0606

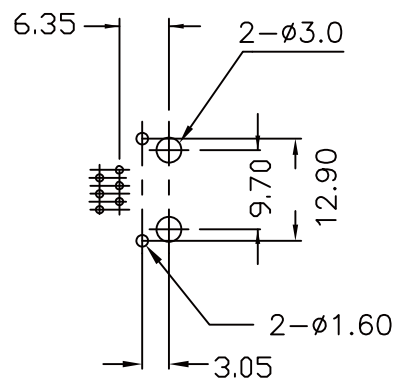

PCB LAYOUT/TOP VIEW
MJF12-KX06B3-0606

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJF12-KX06x3-0606-LF

SERIES LEADFREE

6P6C
A3:FRONT TAB 3.05mm
B3:REAR TAB 3.05mm
BLACK 6u" GOLD
NON EAR

DESCRIPTION: RJ11 6P Very L/P Shielded Modular Jack