

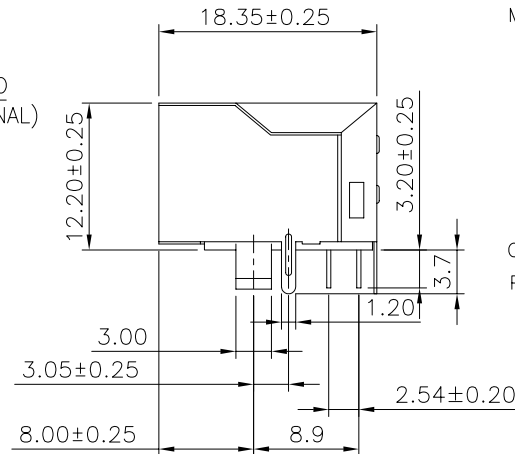
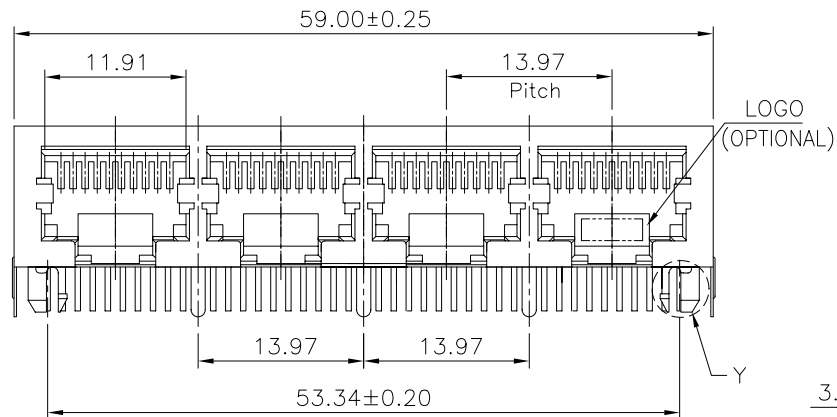


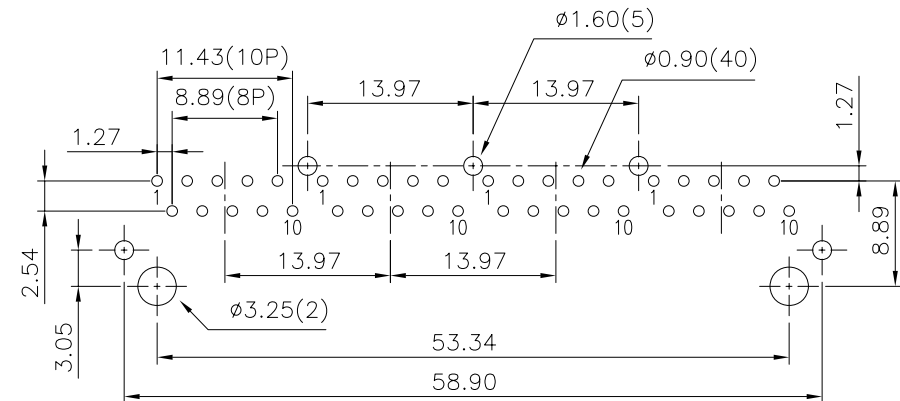

#### MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
RED COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
- SHIELD—0.20mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

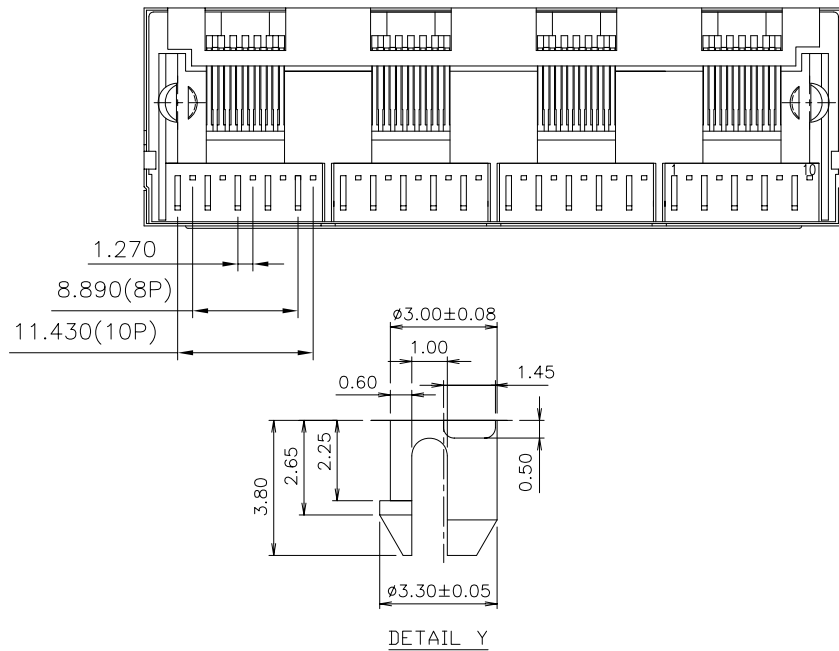

PCB LAYOUT  
Ref.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm 0.20$   
.XX  $\pm 0.10$   
.XXX  $\pm$   
ANG  $\pm$

PPOJECTION



#### ORDER INFORMATION

MJF12A4-KX06B3-1010-LF

SERIES  
BLACK  
10P10C  
LEADFREE  
REAR TAB 3.05mm  
06u" GOLD  
NON EAR

DESCRIPTION: MODULAR JACK, 1X4, RJ45, FLAT PIN, SIDE ENTRY