
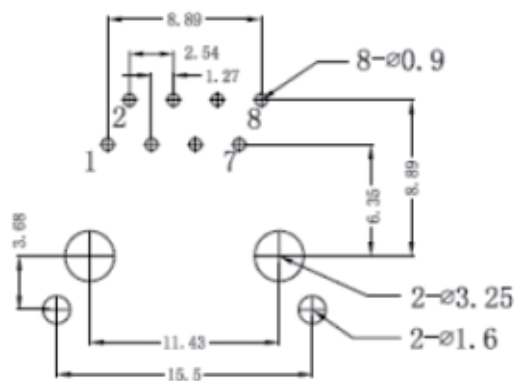
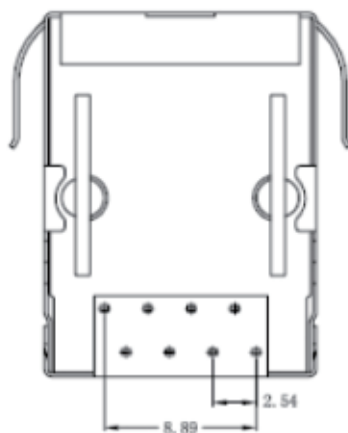
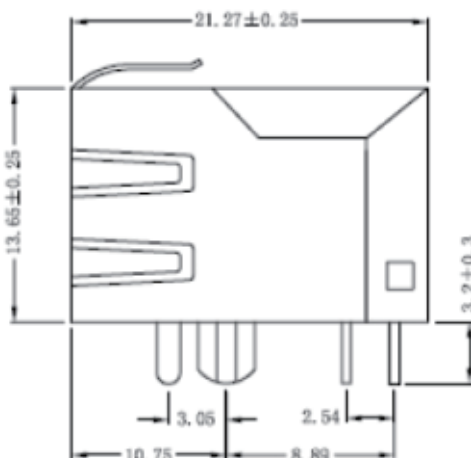


# EXTERNAL DIMENSIONS :

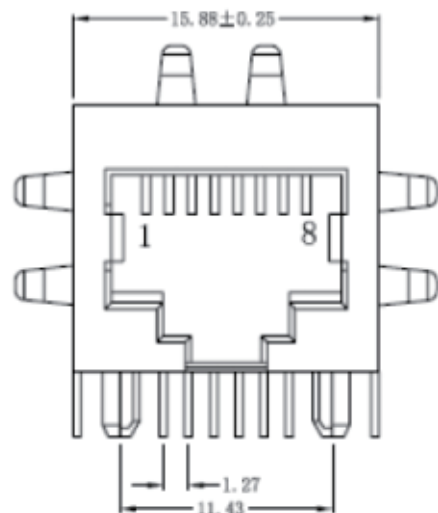

SUGGESTED PCB LAYOUT (TOP VIEW)

## ELECTRICAL CHARACTERISTIC :

Insulation Resistance: 500mΩ Min. @500VDC.

Withstanding Voltage: 1000VAC RMS 50Hz or 60Hz 1Min.

Durability: 600 Mating Circles Min.

RoHS Compliant

TOLERANCES ARE

照片框

## ORDER INFORMATION

MJF13-KFxxA3-0808-LF

SERIES 8P8C LEADFREE  
FRONT TAB 3.05mm  
30u" GOLD  
50u" GOLD  
BLACK  
FULL SPRING

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±