

MATERIAL:


- •HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD OONOR-BLACK
- •ODNTACTS-0.45mm DIA. ROUND ODNTACTS
 PHOS-BRONZE PLATED WITH
 HARD GOLD.
- •MATEL SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.


CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.


8.89

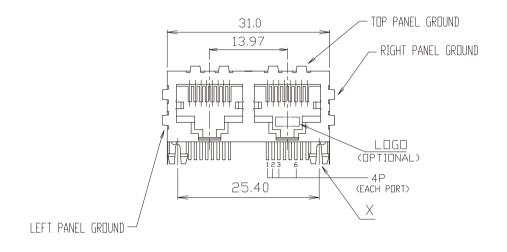









PCB LAYOUT Ref.

Ro	oHS Con	npliant	TOLERANCES ARE
11 ORETHANALL	DRAWING BY CY CHECKED BY GENIUS		X. ± .X ± .XX ±
PCB CONNECTORS Cable ASSEMBLIES			
煜倫股份有限公司	UNIT / mm	SCALE 1:1	.XXX ± ANG ±
应闸队仍们队公司	DATE		ANO ±

SIZE A4

PPOJECTION +

www.morethanall.com

照片框

ORDER INFORMATION		
MJF13A2-KF06A36-0808-LF SERIES		

DESCRIPTION: 2 PORTS, RJ45, SHIELDED SIDE ENTRY PCB GANGED JACK