

Features :


- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- 110/Krone dual IDC connector compatible
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40°C~+60°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max. 0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

HOUSING ABS UL94V-0

CONTACT 0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL

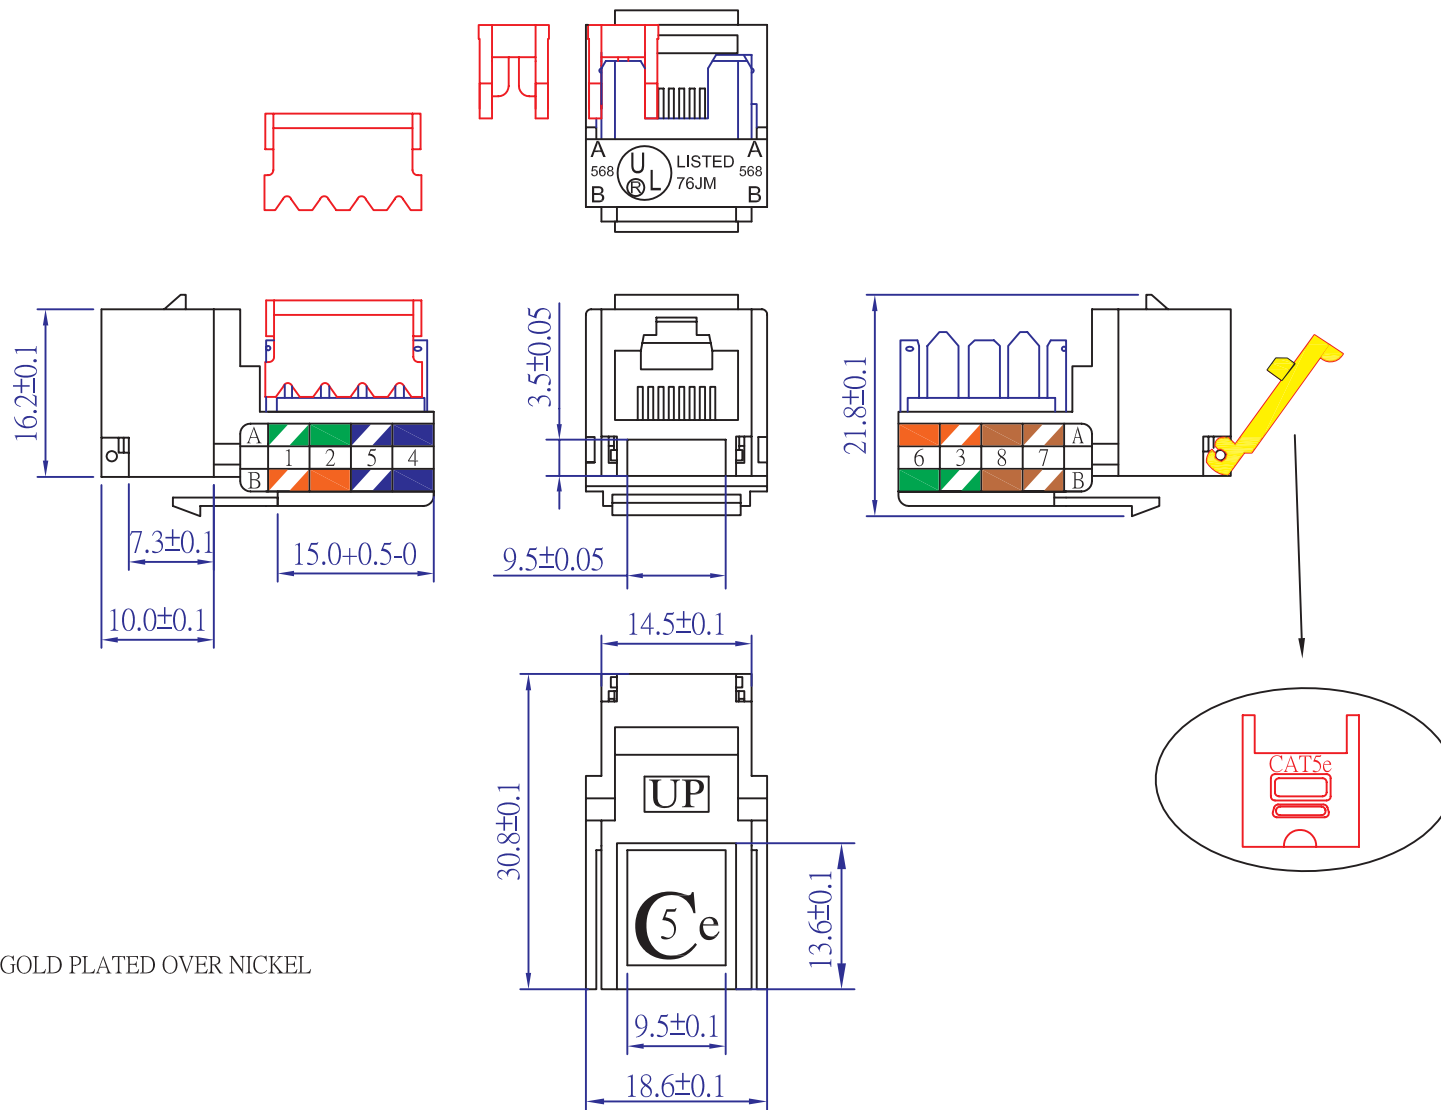

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJK16C5E-TxP50DC-0808-LF

SERIES IDT W:WHITE K:BLACK G:GREEN B:BLUE Y:YELLOW 50u"GOLD PLASTIC R:RED O:ORANGE LEADFREE 8P8C DOOR COVER

DESCRIPTION: