

Specification:

Qualified Cat.6/CLASS E
Permanent Link/Channel of TIA/EIA568B-2.1 Cat.6
ISO/IEC 11801 2nd Edition
EN 50173 2nd Edition
IEC 60603-7

Physicals

Housing : PC,UL94V-0

PCB MODULE

Insertion : PBT UL94V-0

Contact : Ø 0.46 mm Phosphor Bronze

30 Micro inches gold over nickel plating

IDC termination for cable : Accept AWG 23~26 solid wire

Terminal : 0.4 mm Phosphor Bronze tin plating


IDC Holder : PC,94V-0

PCB : FR4 1.0mm Thickness




Cap : PC,UL94V-0

SHIELD CAP : SPTE 0.30mm Thickness

SHIELD BASE : SPTE 0.30mm Thickness

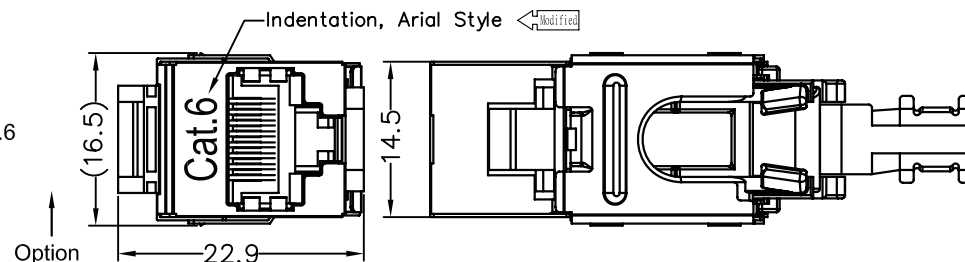

Option

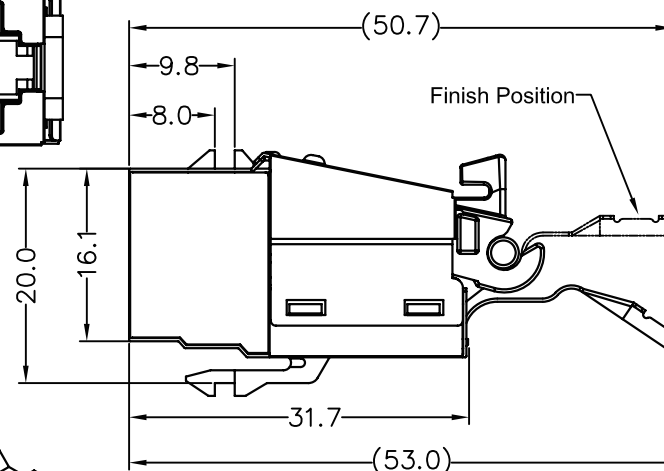

BOTH SIDES COLOR CODE LABEL



RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MJK16C6-TKF30UL-0808-LF

SERIES IDT 30u" GOLD FULL METAL BLACK 8P8C U/LOCK LEADFREE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: CAT.6 STP TOOLLESS KEYSTONE JACK