
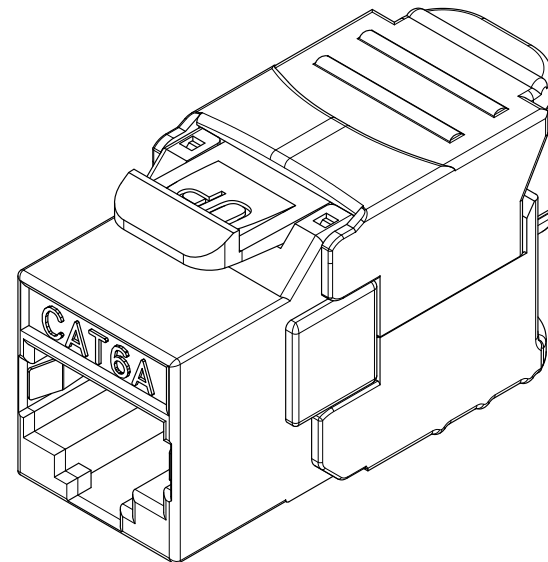
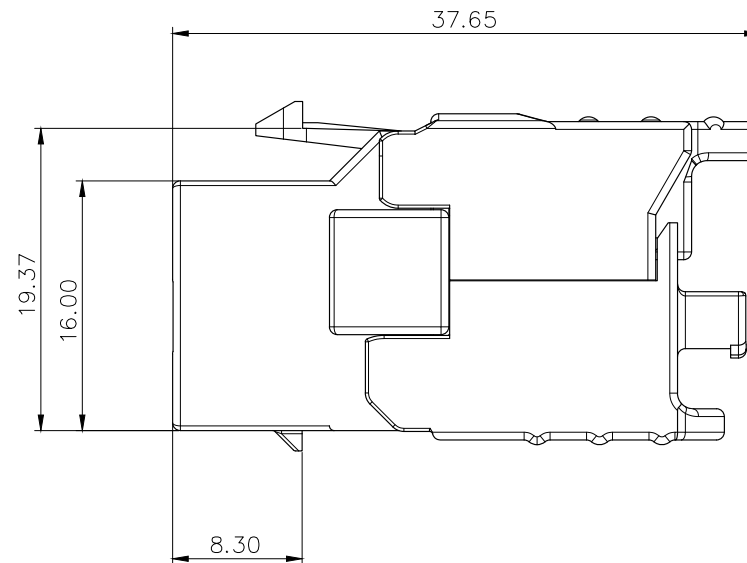


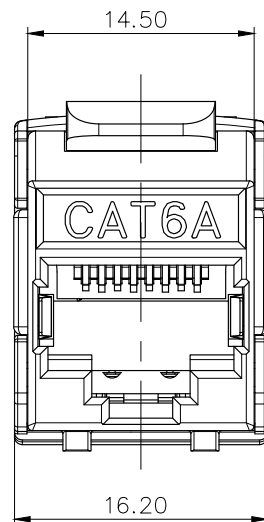

#### NOTES:

##### ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.
6. C6A CONNECTING HARDWARE:

CONFORM TO ANSI/TIA/EIA-568.2-D

7. MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

##### ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

##### MECHANICAL:

1. HOUSING MATERIAL:UL94V-0
2. INSERT MATERIAL:UL94V-0
3. PCB MATERIAL:FR-4
4. CONTACT MATERIAL:PHOSPHOR BRONZE
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE  
WITH SILVER OR NICKEL PLATING
6. WIRE : #22~24AWG

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.10  
ANG ± 5°

照片框

#### ORDER INFORMATION

MJK16C6A-CWF50TL-0808-LF

SERIES

IDC

50u"GOLD

TOOLESS

8P8C

LEADFREE

WHITE

FULL METAL

TOOLESS

8P8C

LEADFREE

DESCRIPTION: C6A Slim Type II Keystone Jack