
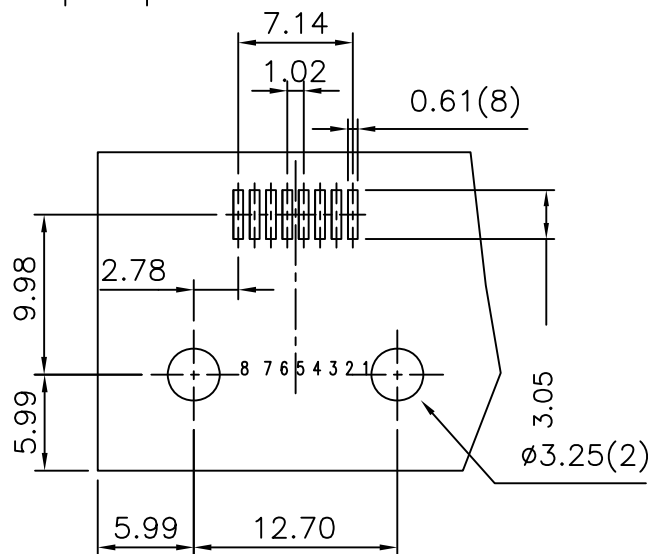
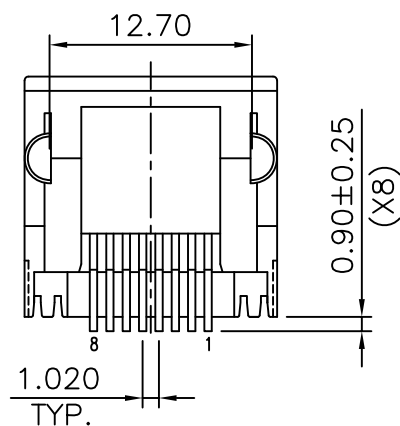
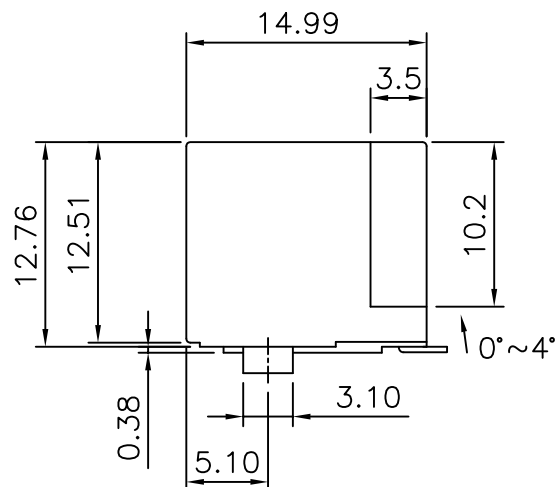


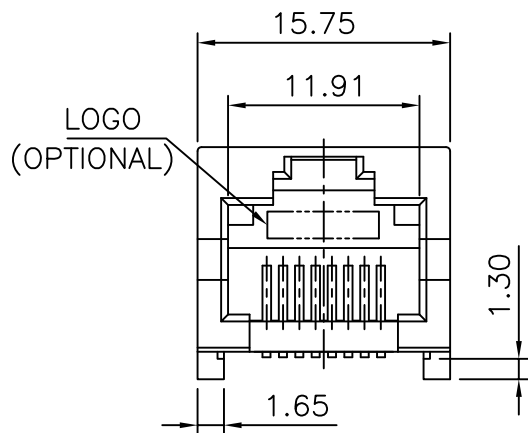

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD IN
SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

PCB LAYOUT

Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

MJW12U-KX06P-0808-LF

SERIES

8P8C

LEADFREE

POST

06u" GOLD

NON EAR

BLACK

DESCRIPTION: MODULAR JACK, RJ45, WITHOUT LED'S SMT TYPE, SIDE ENTRY