


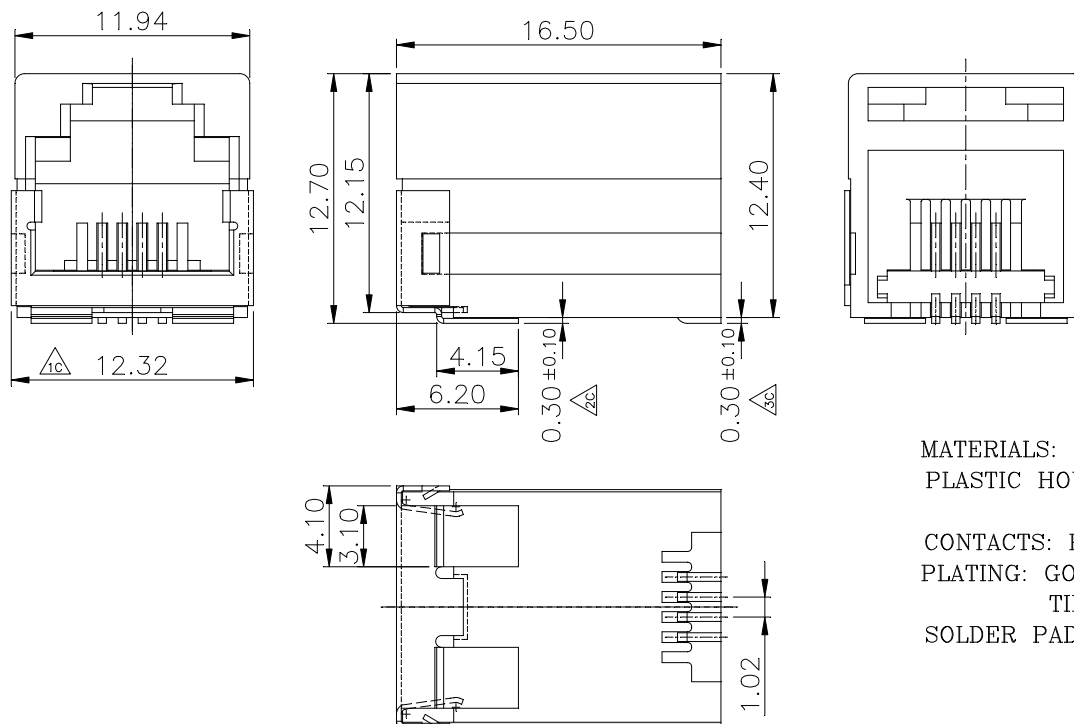

MATERIALS:


PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.

SOLDER PAD: BRASS PLATED TIN ALLOY

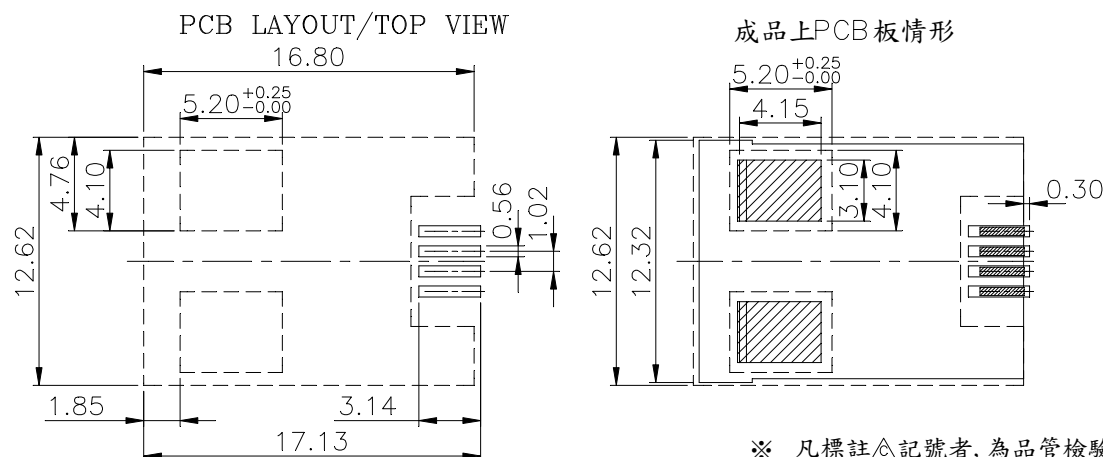

※ 凡標註△記號者, 為品管檢驗之尺寸

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MJW12U-KXxxNR-0604-LF

SERIES

REEL

6P4C

LEADFREE

BLACK
NON POST

INNER EAR

06:06u" GOLD

15:15u" GOLD


30:30u" GOLD

DESCRIPTION:


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

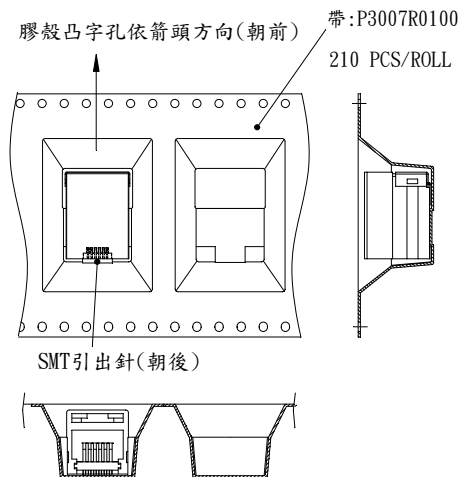


1. 請將組立完成之成品依圖面標示方向順序放入塑膠膜內。

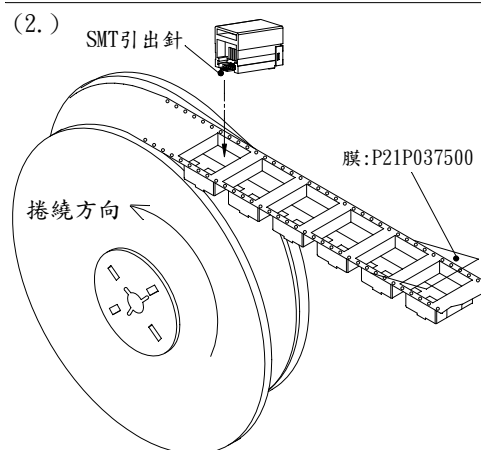

請注意捲帶(P21P037500)上的圓孔不可被塑膠膜或膠帶封住亦不可彎折,以免產生白紋

2. 成品依序放入塑膠膜後,依圖面標示方向進行捲繞(塑膠膜空格保留:前5格後5格)

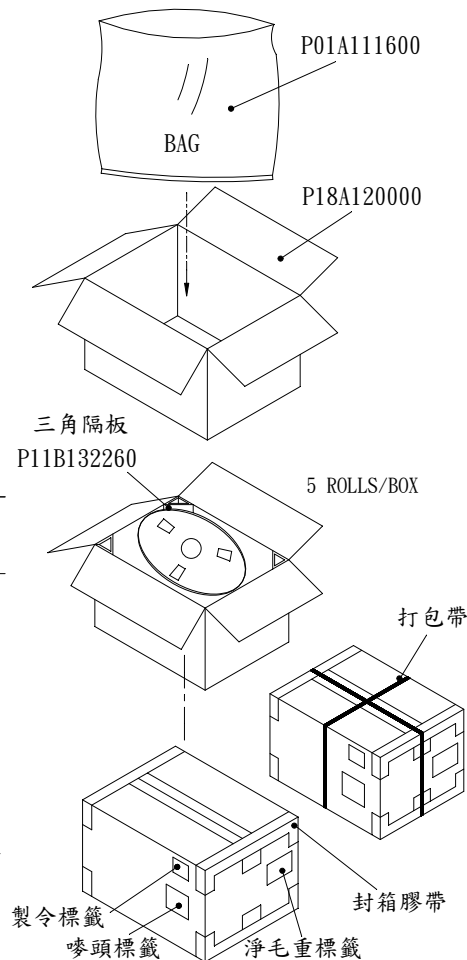

3. 將防水袋(P01A111600)打開套入外箱(P18A120000)內,再將完成包裝之捲盤放入外箱中依圖示貼標籤,以封箱膠帶封箱,依圖示打包。(外箱四周內,放四個三角隔板)

4. 若為不滿箱,請用牛皮紙填充。

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.50

.X, ± 0.38

.XX, ± 0.25

.XXX, ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MJW12U-KXxxNR-0604-LF

SERIES

BLACK

NON POST

REEL

6P4C

LEADFREE

06:06u" GOLD

15:15u" GOLD

30:30u" GOLD

DESCRIPTION: