
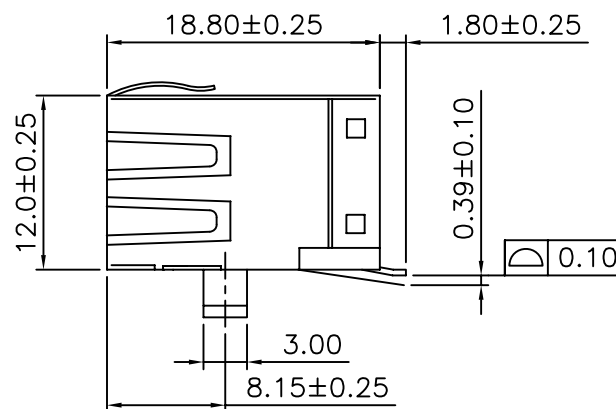
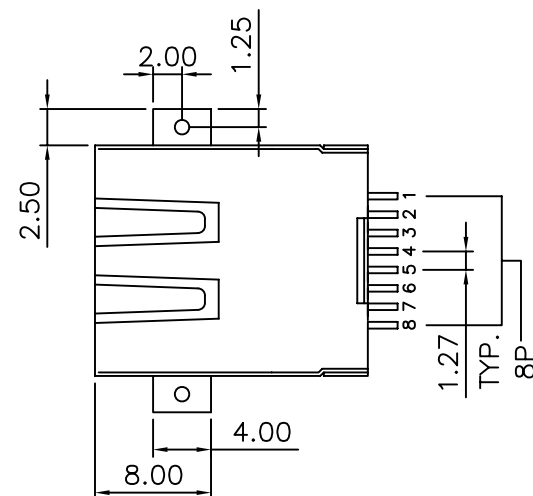
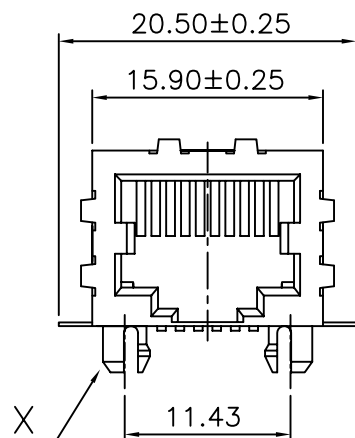


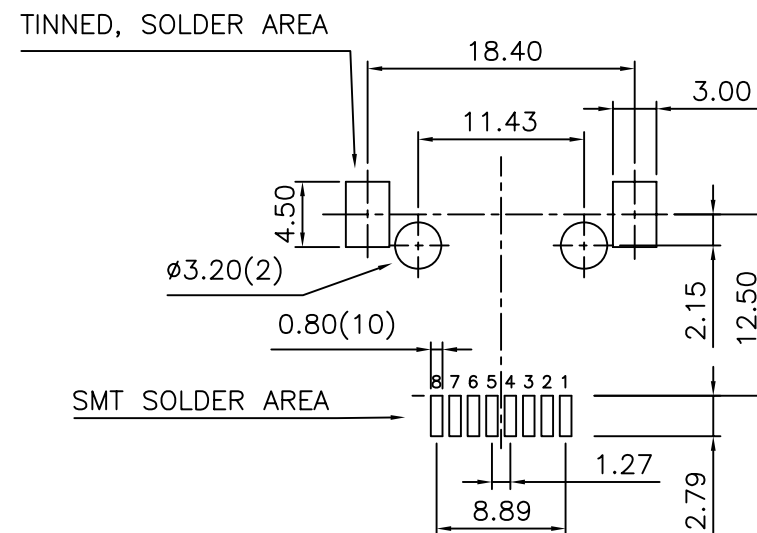

MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK. PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH
IN SOLDER AREA.
- SHIELD—0.25mm THICK. COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

$$X_{\pm}$$

UNIT / mm

SCALE 1 : 1


 $XXX \pm$

DATE _____

ANG ±

SIZE A4

PROJECTION 



ORDER INFORMATION

MJWF12-KF06P-0808LF

SERIES

				LEADFREE
			8P8C	

POST

06u" GOLD
FULL SPRING

1 FULL SPRING
BLACK

TYPE: VERY LOW F

DESCRIPTION: 8POSITION SIDE ENTRY, SMT TYPE VERY LOW PROFILE, SHIELDLESS PCB JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com