
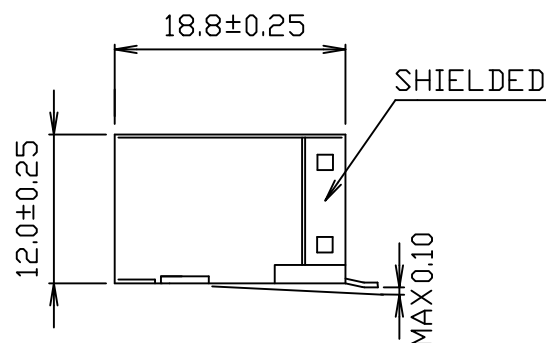
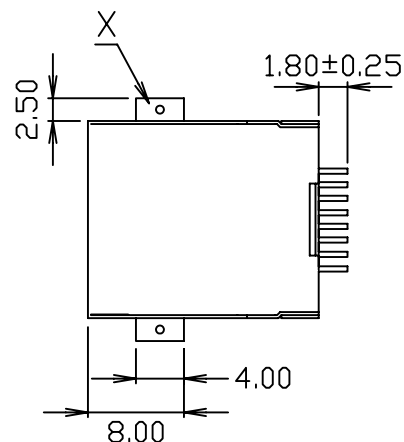
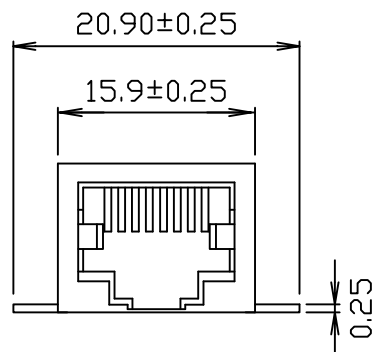



COPLANARITY:

THE MAXIMUM DISTANCE (0.10mm)
BETWEEN LOWEST AND
HIGHEST PIN WHEN
BOTTOM OF PART PUT
ON A FLAT SURFACE

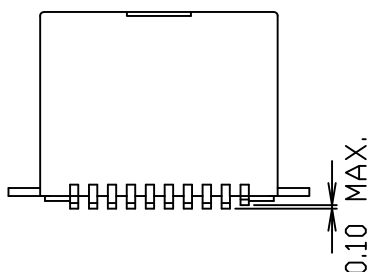

MATERIALS:

HOUSING-DSM STANYL TE250F6 (NYLON-46)

HEAT DEFLECTION TEMP.290°

BLACK COLOR, UL94V-0

OR-NYLON ZYTEL FR-52


HEAT DEFLECTION TEMP.278°

BLACK COLOR, UL94V-0

TERMINAL-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD
IN SOLDER AREA.

SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.

CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

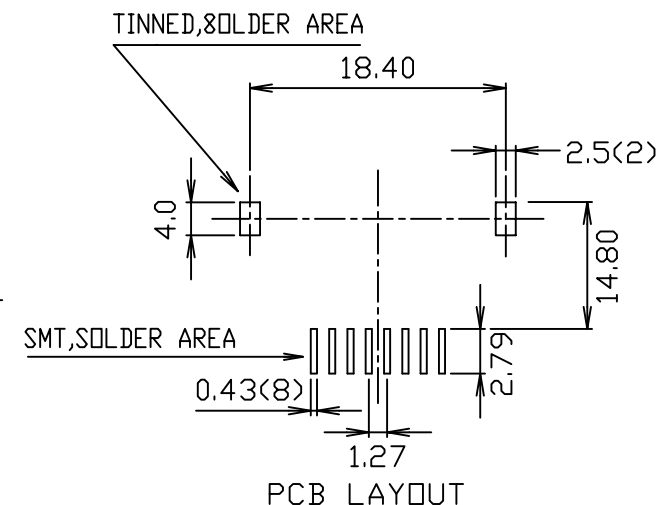

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJWF12-KX06-0808-LF

SERIES

8P8C

LEADFREE

06u" GOLD

NON EAR

BLACK

DESCRIPTION: 10POSITION SIDE ENTRY SMT TYPE VERY LOW PROFILE, SHIELDED PCB JACK