



P.C. Board Layout

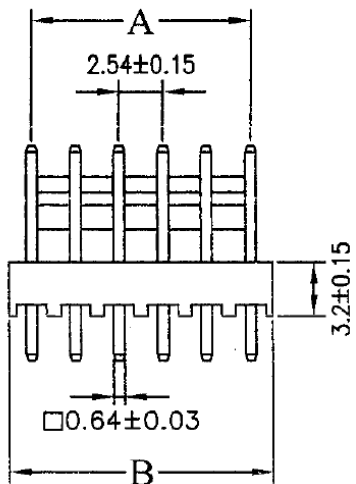

NOTES

- * Poles:2-12
- * Material:Insulator: NYLON66 UL94V-0
Color: White
- * Contact:0.64mm(.025") square pin,brass,
tin plated

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Contact resistance: 20mΩ MAX
- * Withstand voltage: 1,000 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

DIM:"A" & "B" tolerance:

- "A" DIM Tolerance
 2P~05P=±0.15
 6P~08P=±0.20
 9P~20P=±0.30
- "B" DIM Tolerance
 2P~05P=±0.15
 6P~08P=±0.25
 9P~20P=±0.35

CKTS	DIM. "A"	DIM. "B"
2	2.54	5.10
3	5.08	7.68
4	7.62	10.24
5	10.16	12.78
6	12.70	15.24
7	15.24	17.88
8	17.78	20.44
9	20.32	23.00
10	22.86	25.54
11	25.40	28.10
12	27.94	30.64

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X.±
 .X±
 .XX±
 .XXX±
 ANG±

PJECTION



ORDER INFORMATION

MKL-DWH-xx-LF
 SERIES | LEADFREE
 | 02~12WAY
 | WHITE
 | DIP 180°

DESCRIPTION: (2.54mm)CONNECTOR WAFER