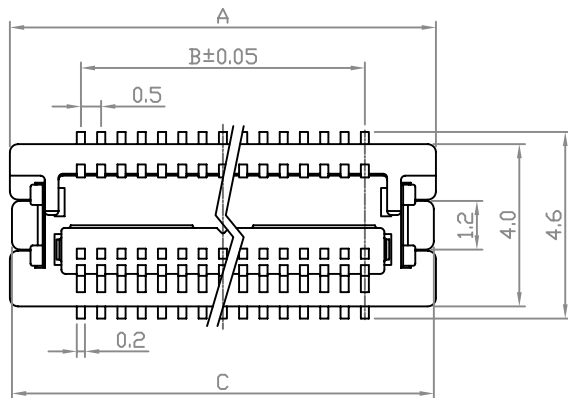


MATED DRAWING

SPECIFICATION

Current Rate:0.5 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:40M Ω Max

Dielectric voltage:500V AC for one minute


Operation Temperature:-20°C to +105°C

MATERIAL


Insulator:Nylon 6T or LCP(UL94V-0)

Contact Pin:Phosphor Bronze


Contact Plated:Gold Plated

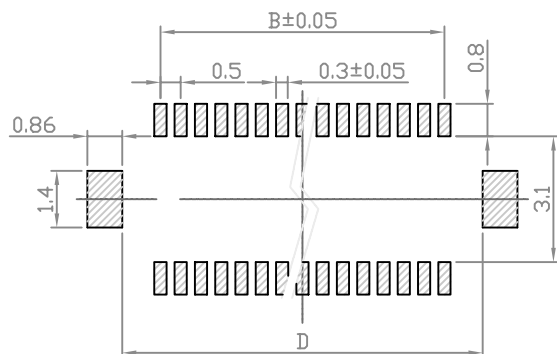

RECOMMEND PCB LAYOUT
(COMPONENT SIDE)

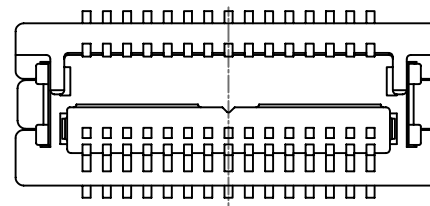

20~60 Position as shown



10~18 Position as shown

NO. OF POSITION	DIMENSIONS			
	A	B	C	D
10	5.5	2.00	5.40	3.88
14	6.5	3.00	6.40	4.88
16	7.0	3.50	6.90	5.38
20	8.0	4.50	7.90	6.38
22	8.5	5.00	8.40	6.88
24	9.0	5.50	8.90	7.38
26	9.5	6.00	9.40	7.88
28	10.0	6.50	9.90	8.38
30	10.5	7.00	10.40	8.88
34	11.5	8.00	11.40	9.88
40	13.0	9.50	12.90	11.38
50	15.5	12.00	15.40	13.88
60	18.0	14.50	17.90	16.38
70	20.5	17.00	20.40	18.88

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MNV-X075-xx-LF

SERIES

LEADFREE

10~70WAY

UNMATED HIGH 0.75mm

NON POST

DESCRIPTION: 0.5mm BOARD TO BOARD M/F ASSEMBLY H:1.5