

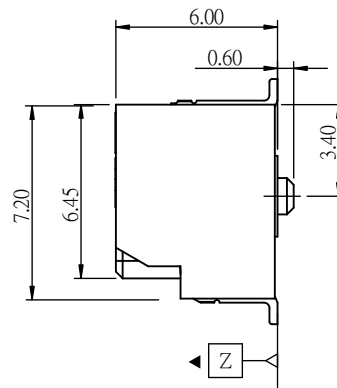
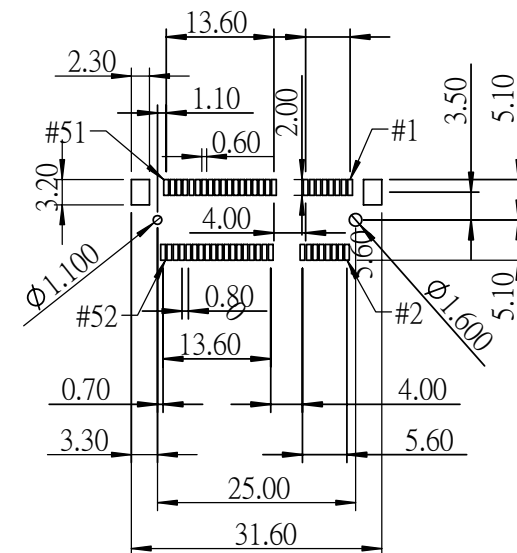

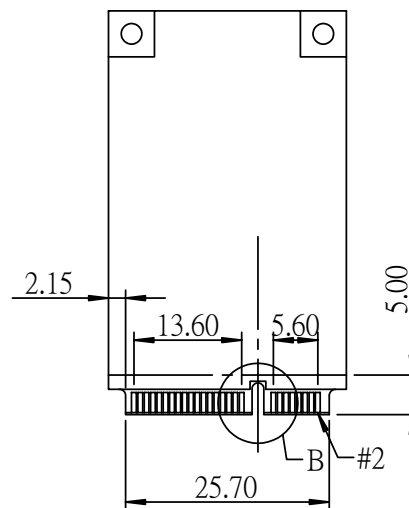

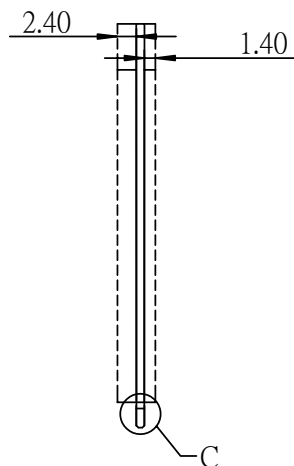





1. SOLDERTAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDERTAILS TO BE WITHIN 0.10 MEASUREMENT POINT IS SOLDERTAILS TIP.
2. MATERIAL:
BASE:THERMOPLASTIC LCP,UL 94V-0,BLACK COLOR
TERMINAL:COPPY ALLOY
- 3.FINISH:
TERMINAL:Gold flash PLATING ON CONTACT AREA,GOLD FLASH ON SOLDERTAIL, Ni 50u" MIN UNDERPLATING.
4. INSPECTION SYMBOL:
● : MANUFACTURER INSPECTION
◆ : Q.C INSPECTION

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES 煜倫股份有限公司 www.morethanall.com		RoHS Compliant		TOLERANCES ARE		照片框	ORDER INFORMATION			
DRAWING BY CY		X. ± 0.40		MPCI-W60-052-LF						
CHECKED BY GENIUS		.X ± 0.30		SERIES			LEADFREE			
UNIT / mm		.XX ± 0.20		52 WAY			HIGH 6.0mm			
SCALE 1 : 1		.XXX ± 0.10		90°SMT						
DATE		ANG $\pm$								
SIZE A4		PPOJECTION 						DESCRIPTION: MINI PCI EXPRESS ASSEMBLY		

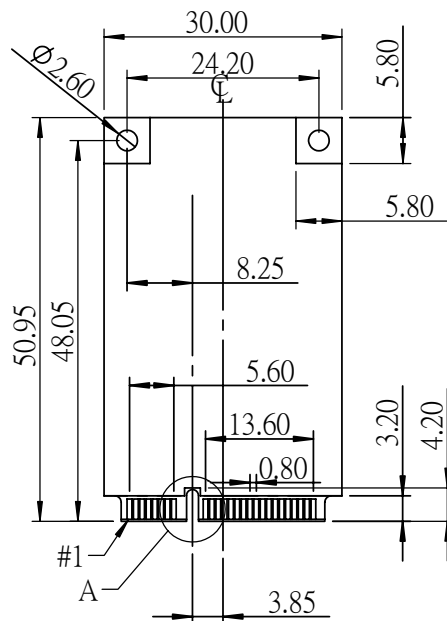

PCB LAYOUT

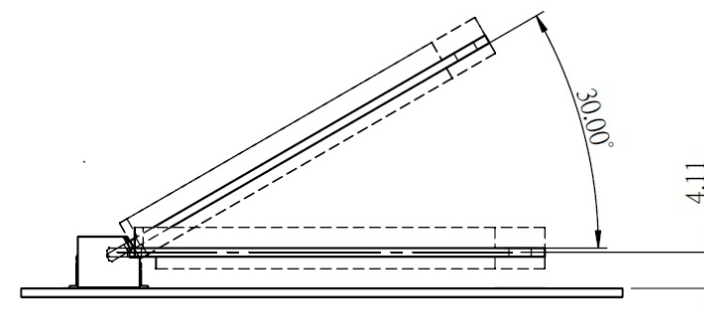

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MPCI-W60-052-LF

SERIES

LEADFREE

52 WAY

HIGH 6.0mm

90°SMT

DESCRIPTION: MINI PCI EXPRESS ASSEMBLY