

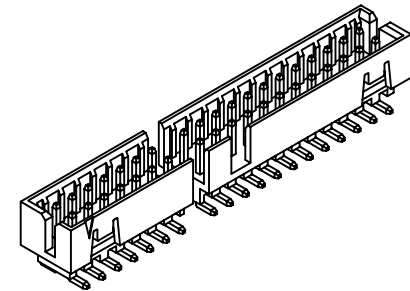


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +85° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T

Finish: Gold Plated

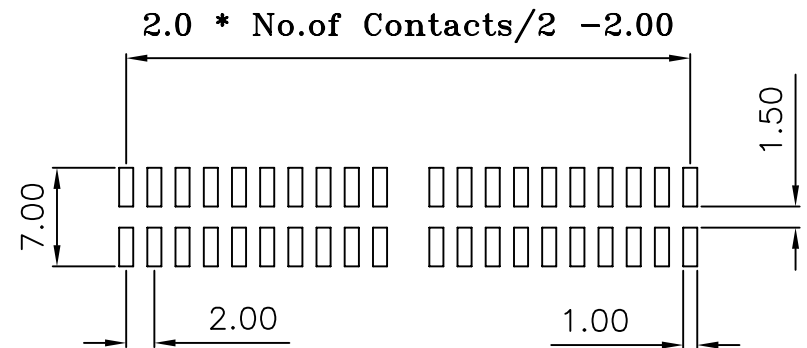

Recommended P.C. Board
 SMD Layout

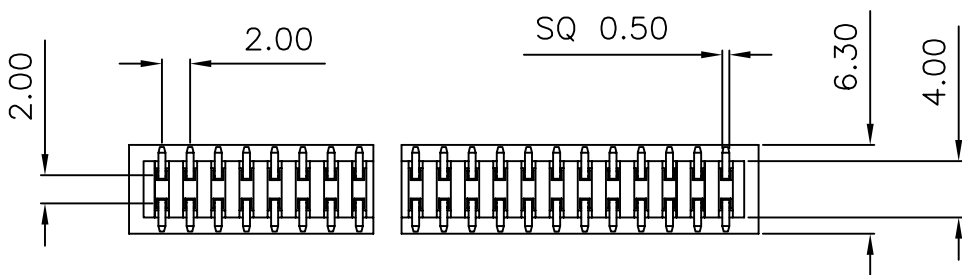

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

MPVK-VX-2Xxx-LF

SERIES | LEADFREE
 2X07 :14WAY
 2X25 :50WAY
 NON POST
 180°SMT

DESCRIPTION: