



Current Rating: 2 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20m ohms max.  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +85° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester,UL 94V-0  
 Standard: Nylon-6T

Finish: Gold Plated

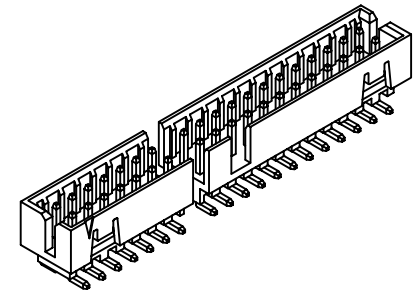

Recommended P.C. Board  
 SMD Layout

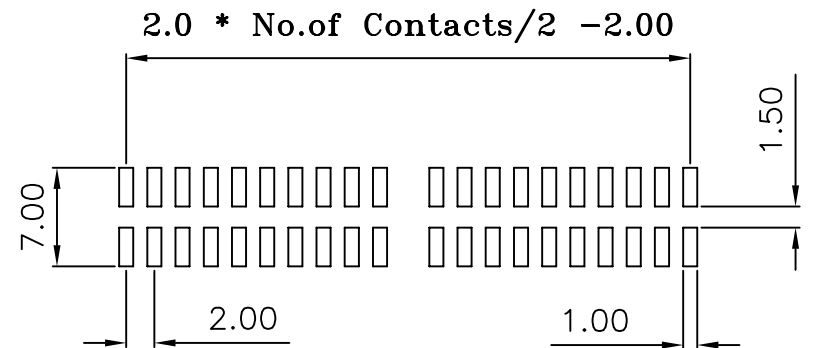

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MPVK-VXS30-2Xxx-LF

SERIES

LEADFREE

2X07 :14WAY

2X25 :50WAY

SEMI GOLD 30u"

NON POST

180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: