


Current Rating and Voltage: 2 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Standard: Brass  
 Insulator Material: High Temperature  
 Plastic,UL 94V-0  
 Finish: Standard: Gold Flash all over

Recommended P.C. Board  
 SMD Layout

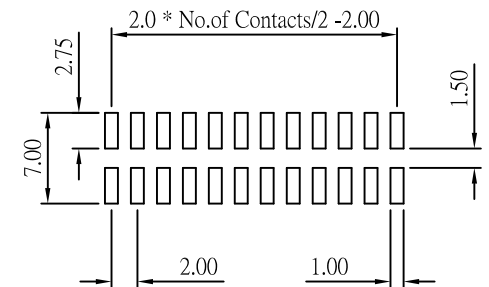

©: DIMENSIONS

08 pin	20 pin	32 pin
10 pin	22 pin	34 pin
12 pin	24 pin	40 pin
14 pin	26 pin	44 pin
16 pin	30 pin	50 pin

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

MPVK-VXS30C-2Xxx-LF

SERIES | | | LEADFREE  
 | | | 2X04 :08WAY  
 | | | 2X25 :50WAY  
 | | | CAP  
 180°SMT SEMI GOLD 30u"  
 NON POST

DESCRIPTION: