
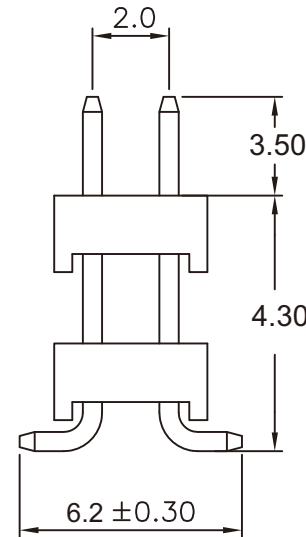


Specifications


Current Rating: 1Amp
 Insulation Resistance: 5000MΩ Min.
 Dielectric Withstanding: 500VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T

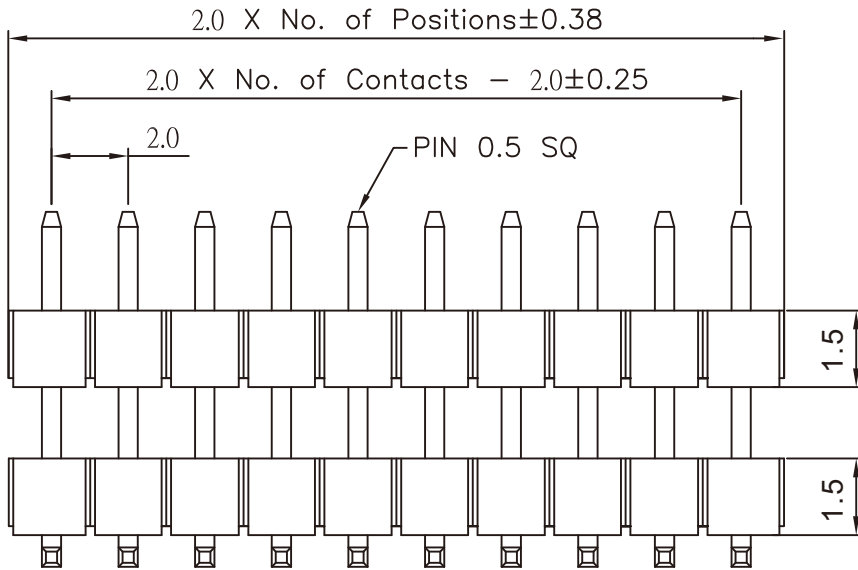

Recommended P.C.Board Layout

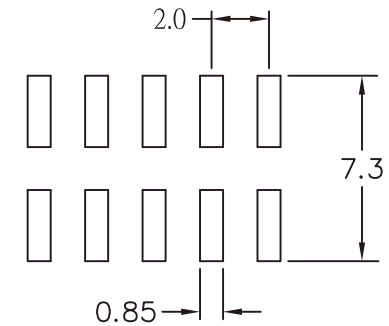

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

P PROJECTION

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

照片框

ORDER INFORMATION

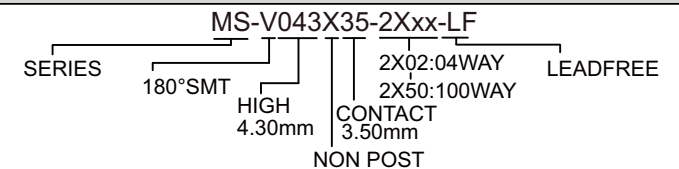

DESCRIPTION: 2.0 PIN HEADER DUAL ROW SMT TYPE BASE 2.54