
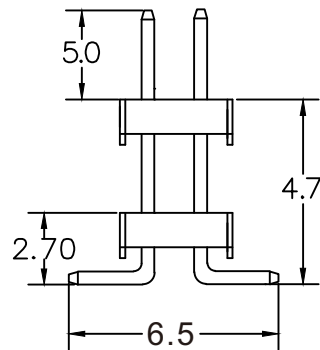


RECOMMENDED P.C.B LAYOUT

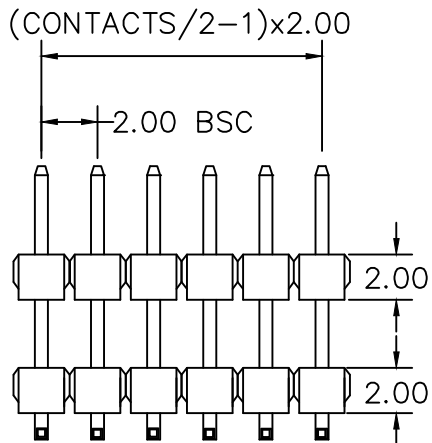

| | |
|----------|------|
| CONTACTS | 2X21 |
| 2X2 | 2X22 |
| 2X3 | 2X23 |
| 2X4 | 2X24 |
| 2X5 | 2X25 |
| 2X6 | 2X26 |
| 2X7 | 2X27 |
| 2X8 | 2X28 |
| 2X9 | 2X29 |
| 2X10 | 2X30 |
| 2X11 | 2X31 |
| 2X12 | 2X32 |
| 2X13 | 2X33 |
| 2X14 | 2X34 |
| 2X15 | 2X35 |
| 2X16 | 2X36 |
| 2X17 | 2X37 |
| 2X18 | 2X38 |
| 2X19 | 2X39 |
| 2X20 | 2X40 |

MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 1A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
DIELECTRIC STRENGTH : 1000 VAC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MS-V047X50-2Xxx-LF
SERIES | LEADFREE
180°SMT | 2X02:04WAY
HIGH 4.7mm | 2X40:80WAY
NON POST | CONTACT 5.0mm

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: