
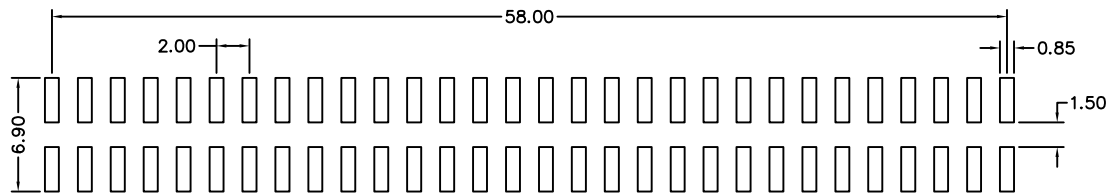



MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

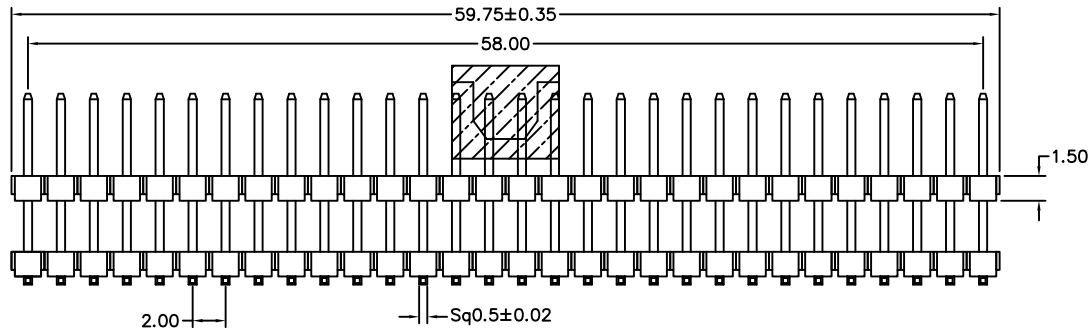

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MS-V066X50C-2X30-LF
SERIES | LEADFREE
180°SMT | 60 WAY
NON POST | CAP CONTACT 5.0mm
HIGH 6.6mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com