

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4


X. ±
.X ±0.30
.XX ±0.20
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MS-V070X31-2X07-LF

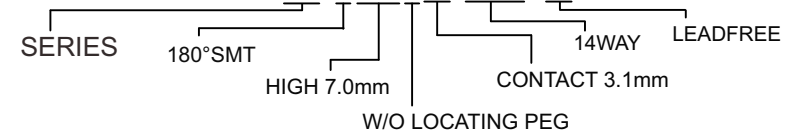

DESCRIPTION: PIN HEADER 2.00*2.00mm SMT S/T TYPE, DUAL ROWS DUAL INSULATORS,