

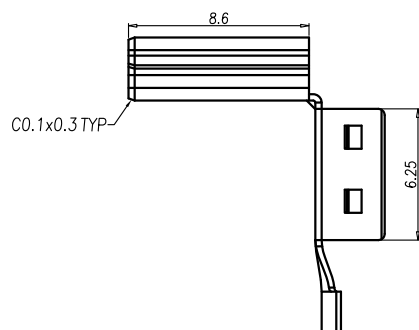

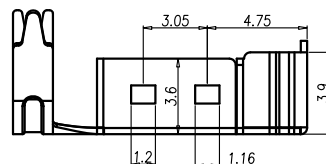







RIGHT ANGLE
BACK COVER



FRONT SHELL



BACK SHELL

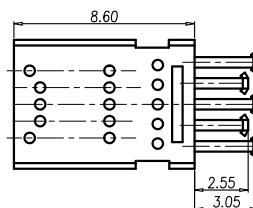

NOTE:

1.ELECRTICAL PROPERTIES:

- 1-1.CONTACT CURRENT RATING:1A AT 250V AC MIN.
- 1-2.CONTACT RESISTANCE:50m Ohm MAX
- 1-3.INSULATION RESISTANCE:100M Ohm MIN.
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V/1 MINUTE.

2.MATERIAL:

- 2-1.PIN:PHOSPHOR BRONZE
- 2-2.HOUSING: LCP,UL 94V-0.
- 2-3.BACK COVER:PBT + 30% GF,UL94V-0.
- 2-4.COVER SHELL:STELL.
- 2-5.BASE SHELL:STELL.

3.PLATING:

- 3-1.PINS: GOLD PLATED SEE TABLE A MIN ON CONTACT AREA, BRIGHT TIN 80u" MIN ON SOLDER TAILS, UNDERPLATED NICKEL OVER ALL 50u" MIN.
- 3-2.SHELL: NICKEL OVER ALL 60u" MIN.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MSB-PSR-4B-LF
SERIES | | LEADFREE
| | 4 PIN B TYPE
| 90°
| SOLDER
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: MiniUsb 5PIN(M) 90度插