
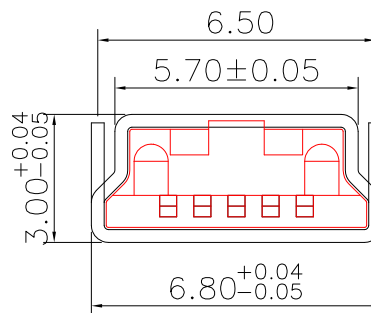


PCB,LAYOUT

NOTE:

- 1.MATERIAL:
SEE TABLE
- 2.MECHANICAL:
MATING: 35N MAX.
WITHDRAWAL FORCE: 7N MIN.
DURABILITY: 5000 CYCLES.
- 3.ELECTRICAL:
CURRENT RATING: 1.0A
CONTACT RESISTANCE:50 Milliohms MAX.
INSULATION RESISTANCE: 100 Megohms MIN.
WITHSTANDING VOLTAGE: 100 VAC
- 4.FINISH:
CONTACT: 1u" GOLD MIN. PLATING ON CONTACT AREA
120u"MIN. TIN PLATING ON SOLDER TAILS
50u" MIN. NICKEL UNDERPLATING OVER ALL
SHELL:80u" MIN. NICKEL OVER ALL
- 5.ENVIRONMENTAL:
OPERATURE RANGE:-25°C TO +85°C

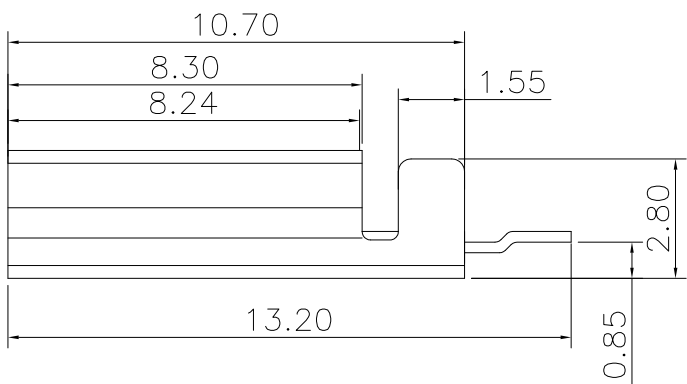

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MSB-PWM1H08P-5B-LF
SERIES | | | | LEADFREE
MALE | | | | 5 PIN B TYPE
POST
HIGH 0.85mm
METAL FOOT
90°SMT

DESCRIPTION: MINI USB 5P/M B TYPE SMT