
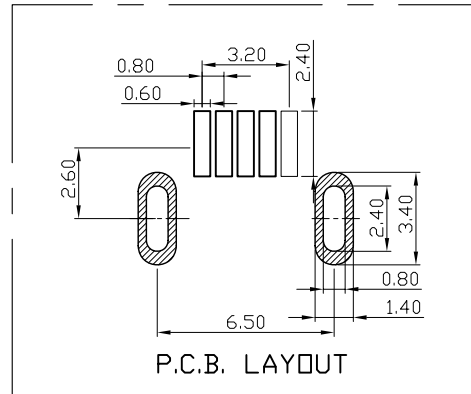


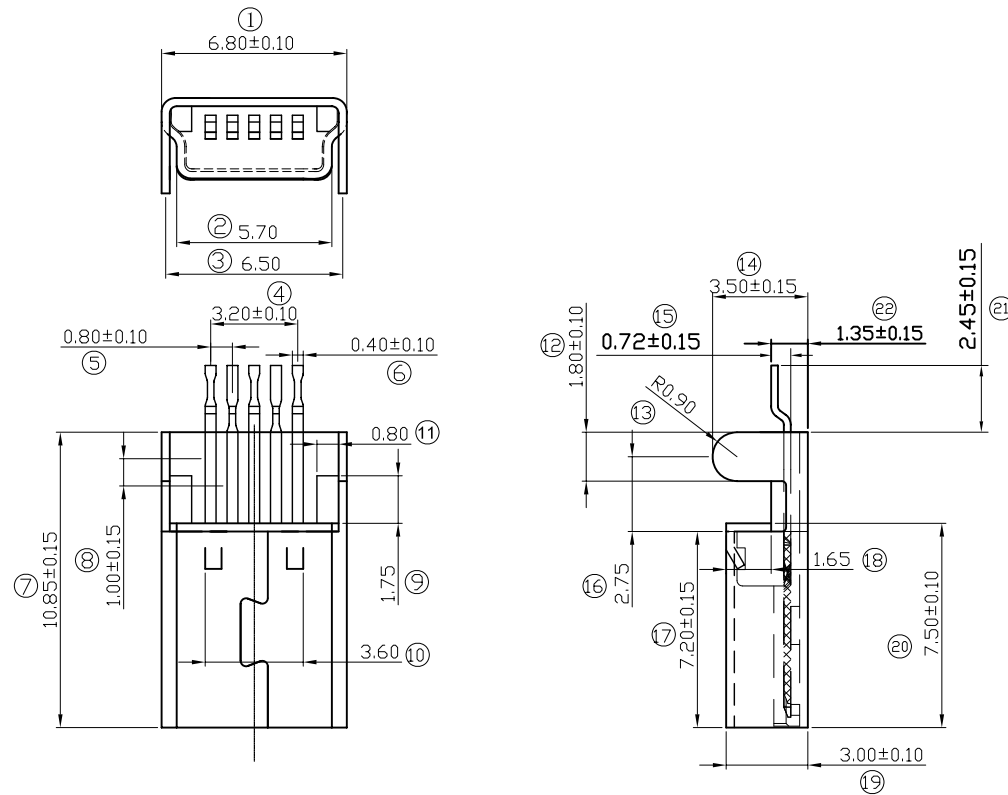

Note:

1.Material:

- 1.1 Insulator: NY6T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold rolled steel,t=0.30mm.

2.specification:

- 2.1 Current rating:1A MAX.
- 2.2 Dielectric withstanding voltage:500 v(ac) far minuta.
- 2.3 Contact resistance: 30 mΩ max.
- 2.4 Insulation resistance: 1000 MΩ min at DC 500V.
- 2.5 Total mating force: 3.57 kgf max.
- 2.6 Total unmating force: 0.71 kgf min.
- 2.7 Temperature range: -25°C~+105°C.

3.Finishes:

- 3.1 Contacts: Gold flashed, 1u",3u",5u",15u", 30u".on Contact area .  
100u"-120u" Tin. Plating on soldertails  
50u"-80u" Nickel .underplating over all
- 3.2 Shell: 50u"-80u" Cu Plating on soldertails  
80u"-100u" Nickel underplating over all

| 3   | SHELL     | 1    | Cold rolled steel | T=0.30±0.02mm | Nickel Plated |
|-----|-----------|------|-------------------|---------------|---------------|
| 2   | CONTACT   | 5    | Brass             | T=0.25±0.02mm | 30u"          |
| 1   | HOUSING   | 1    | NY6T              |               | Black         |
| No. | Part Name | Q'ty | Material          | Thickness     | Finish        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

MSB-PWM1H13-5B-LF  
SERIES | LEADFREE  
5 PIN B TYPE  
HIGH 1.35mm  
MALE | METAL FOOT  
90°SMT

DESCRIPTION: