
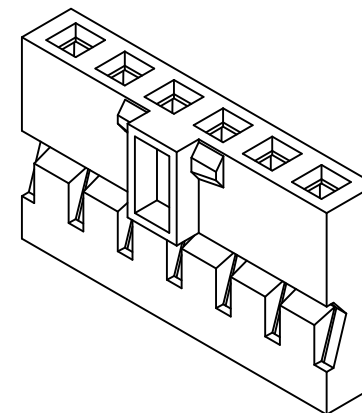
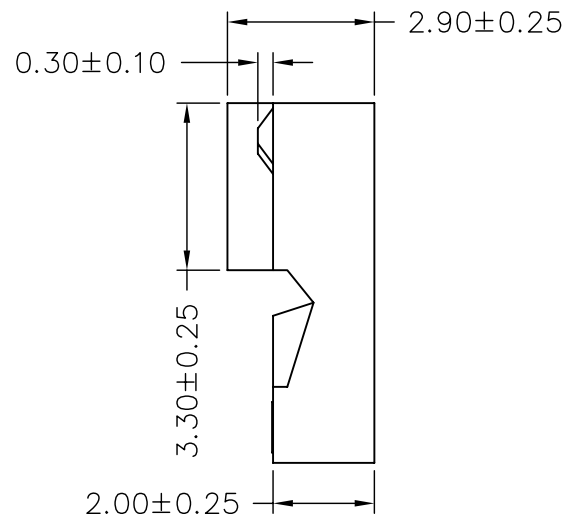
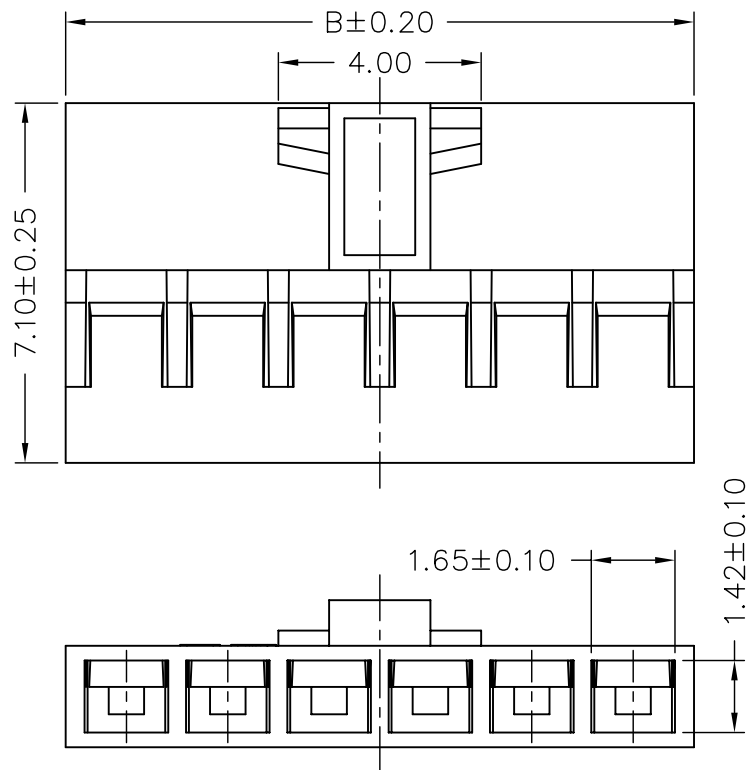


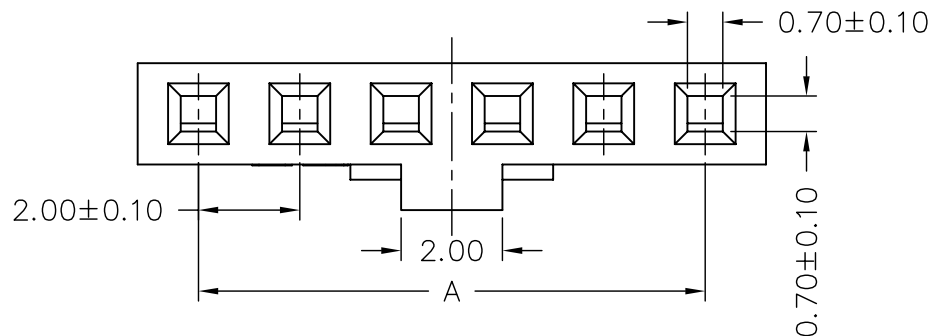

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White&Black)

Circuit No.	Dimensions	
	A	B
04P	6.00	8.40
05P	8.00	10.40
06P	10.00	12.40
07P	12.00	14.40
10P	18.00	20.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MTK-H-1Xxx-LF
 SERIES LEADFREE
 1X04:04WAY
 1X10:10WAY
 HOUSING

DESCRIPTION: 2.00mm PITCH SINGLE ROW HOUSING