

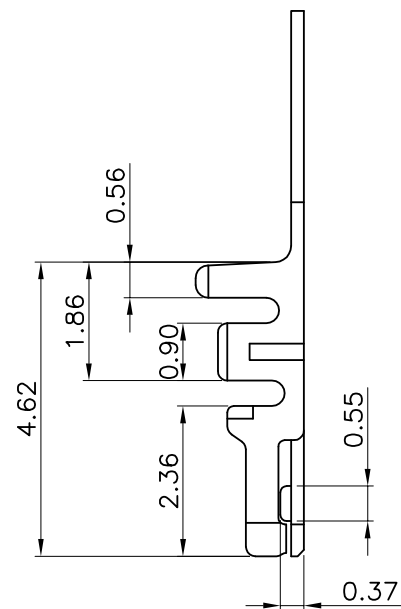
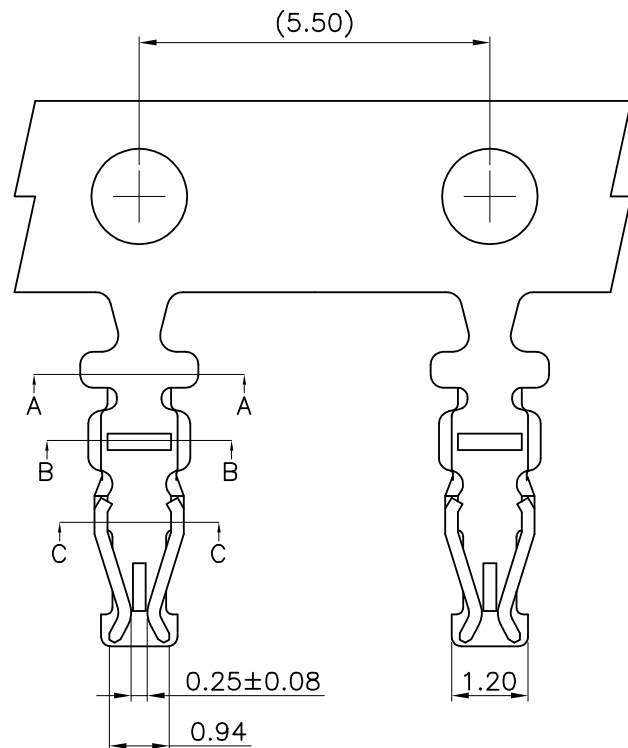


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.20\text{mm}$.
2. FINISH: GOLD FLASH OVER NICKEL.
3. APPLICABLE WIRE RANGE: AWG#24~#28
4. INSULATION O.D.: $\phi 1.20\text{mm}$ (MAX.)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

MTK-TG-24-LF
SERIES T T LEADFREE
24~28 AWG
GOLD
TERMINAL





DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, CRIMP TYPE, CONTACT

PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	470*470*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
MTK-TG-24	12,000	8	96,000

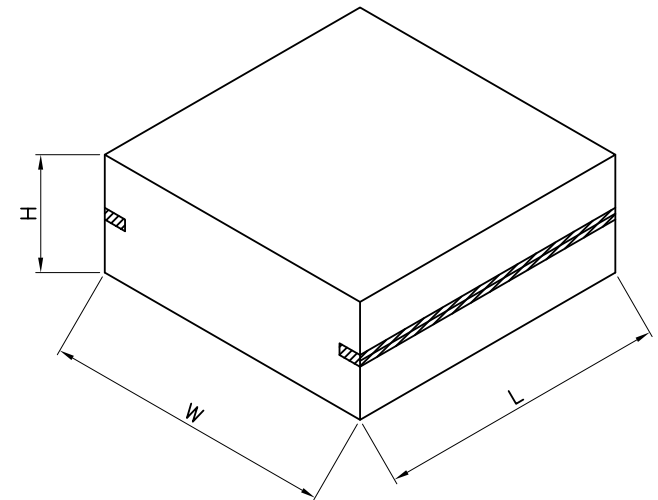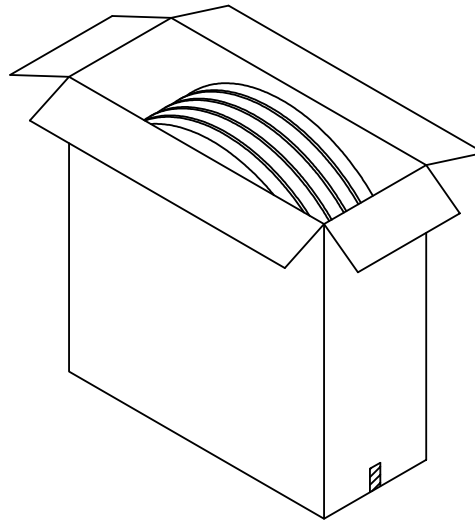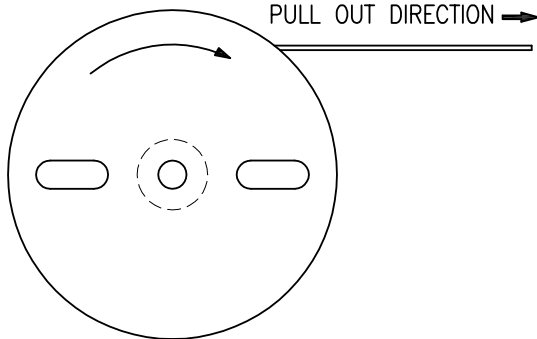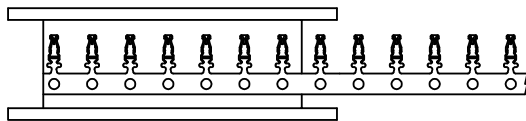

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.08

ANG $\pm 3^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

MTK-TG-24-LF
SERIES T T LEADFREE
24~28 AWG
GOLD
TERMINAL

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, CRIMP TYPE, CONTACT