

NOTES:

SPECIFICATION

- 1.Current : 2.5A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 500K Megohms Min.
- 4.Contact Resistance: 20 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1500V AC
- 6.Temperature: 0°C to +75°





MATERIAL

- 1.Contact: Brass
- 2.Housing:Nylon,UL 94V-2
- 3.PLATING :

UNDERPLATING: NICKEL PLATING FOR
ALL 50u"or 100u" MIN.

SOLDER TAIL PLATING: TIN PLATING 100u"~200u".

PART NO	Dimension		PART NO	Dimension	
	A	B		A	B
MX-S-02	2.54	5.10	MX-S-16	38.10	40.66
MX-S-03	5.08	7.64	MX-S-17	40.64	43.20
MX-S-04	7.62	10.18	MX-S-18	43.18	45.74
MX-S-05	10.16	12.72	MX-S-19	45.72	48.28
MX-S-06	12.70	15.26	MX-S-20	48.26	50.82
MX-S-07	15.24	17.80	MX-S-21	50.80	53.36
MX-S-08	17.78	20.34	MX-S-22	53.34	55.90
MX-S-09	20.32	22.88	MX-S-23	55.88	58.44
MX-S-10	22.86	25.42	MX-S-24	58.42	60.98
MX-S-11	25.40	27.96	MX-S-25	60.96	63.52
MX-S-12	27.94	30.50	MX-S-26	63.50	66.06
MX-S-13	30.48	33.04	MX-S-27	66.04	68.60
MX-S-14	33.02	35.58	MX-S-28	68.58	71.14
MX-S-15	35.56	38.12	MX-S-29	71.12	73.68

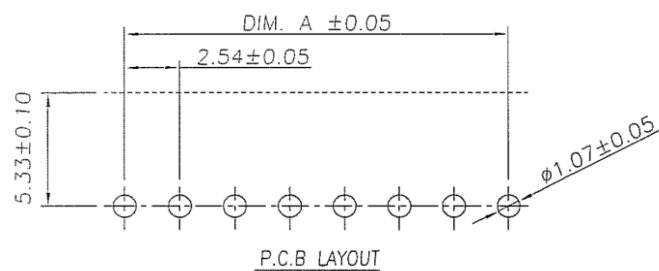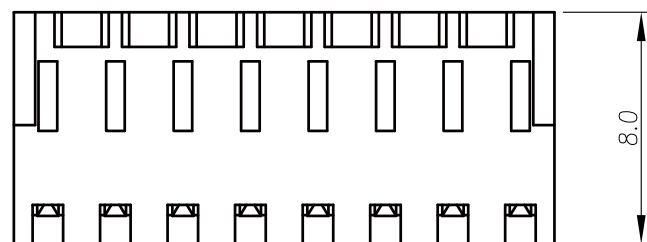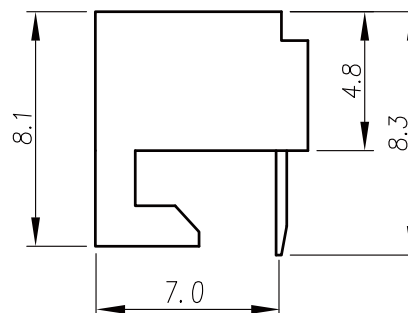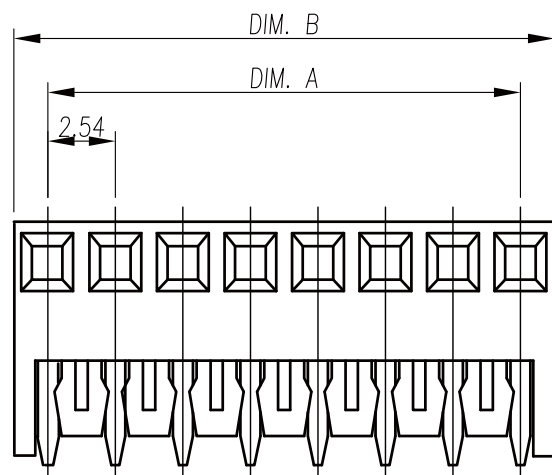

RoHS Compliant

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.35
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION



ORDER INFORMATION

MX-S-xx-LF
SERIES | LEADFREE
02~29WAY
SIDE ENTRY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com