

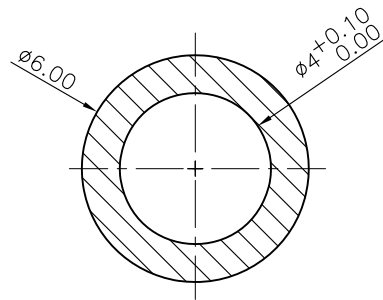




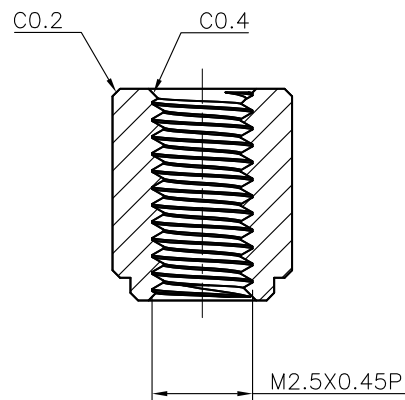

Recommended Layout (top view)
General Tolerance: $\pm 0.05\text{mm}$

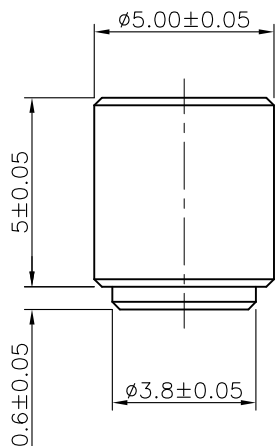

2	MYLAR	0.1t
1	NUT	Low Lead Brass, Tin Plating
NO.	PART NAME	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.12

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MXM-LSN78C-149165-LF
SERIES MYLAR 314 WAY LEADFREE
MYLAR
7.8mm HIGH
NUT
LATCH SCREW

DESCRIPTION: MXM 3.0 314 pin for SMARC 0.5 Pitch, 7.8H, Standard Type, Reel