


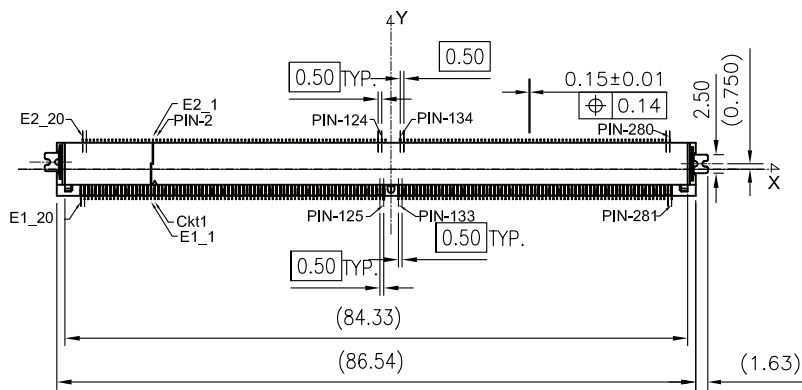

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR: BLACK.

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL: COPPER ALLOY

1.4 BOARD LOCK: COPPER ALLOY

2. FINISH:

2.1 CONTACT:

UNDERPLATING: 50u" MIN. NICKEL OVERALL.

FINISH: GOLD 3u" MIN. ON CONTACT, GOLD FLASH ON SOLDER TAIL

2.2 FITTING NAIL:

UNDERPLATING: 50u" MIN. NICKEL OVERALL.




FINISH: 100~200u" MATT TIN OVER ALL

3. REFLOW SOLDER CAPABLE TO 260°C

4. ROHS COMPLIANT PRODUCT.

5. SUGGESTION: PLS PAY ATTN TO THE DEFORMATION DIRECTION OF
PCB-SMT IN CONNECTOR LAYOUT AREA

6. PCB 焊熱變形限制: 相同CONN. 長度方向(ex. 86.54mm), PCB 焊熱變形量限制 0.05MAX.

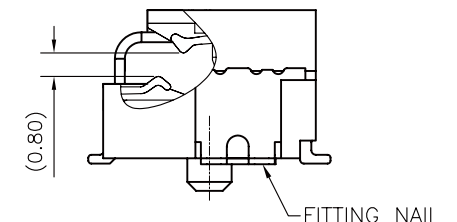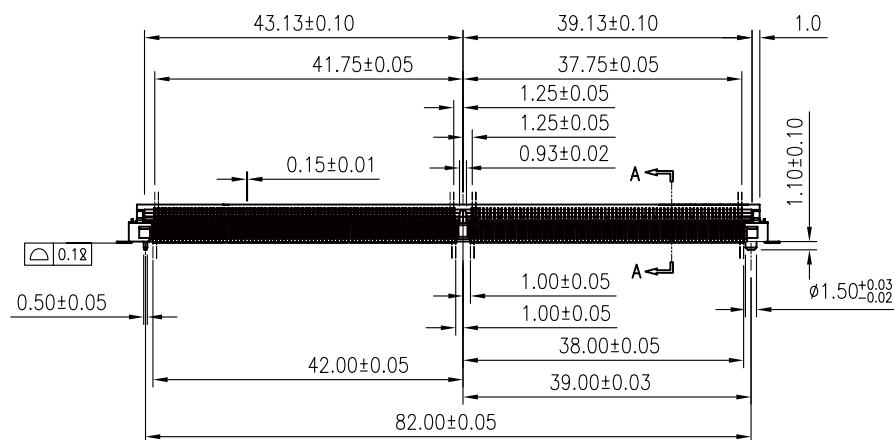

SECTION A-A Scale 4:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MXM-W052EP2-165149-LF

SERIES

314 WAY



LEADFREE

EAR+POST

HIGH 5.2mm

90°SMT

DESCRIPTION: MXM 314 PINS 0.5mm PITCH EDGE CARD CONN.
SMT D/R R/A STD TYPE H=5.2mm (BTB H=2.7)

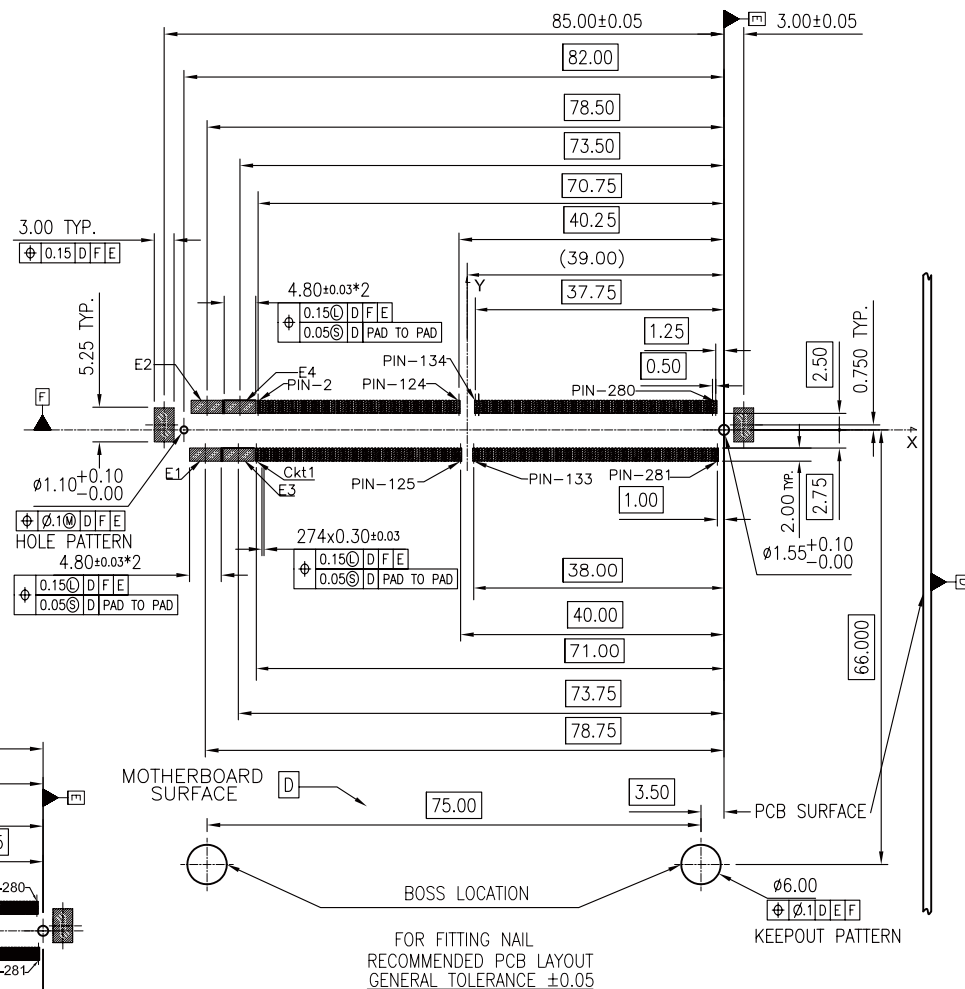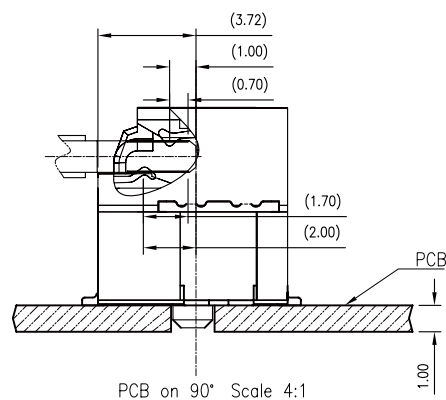


www.morethanall.com

PPOJECTION

照片框

90°SMT

DESCRIPTION: MXM 314 PINS 0.5mm PITCH EDGE CARD CONN.
SMT D/R R/A STD TYPE H=5.2mm (BTB H=2.7)

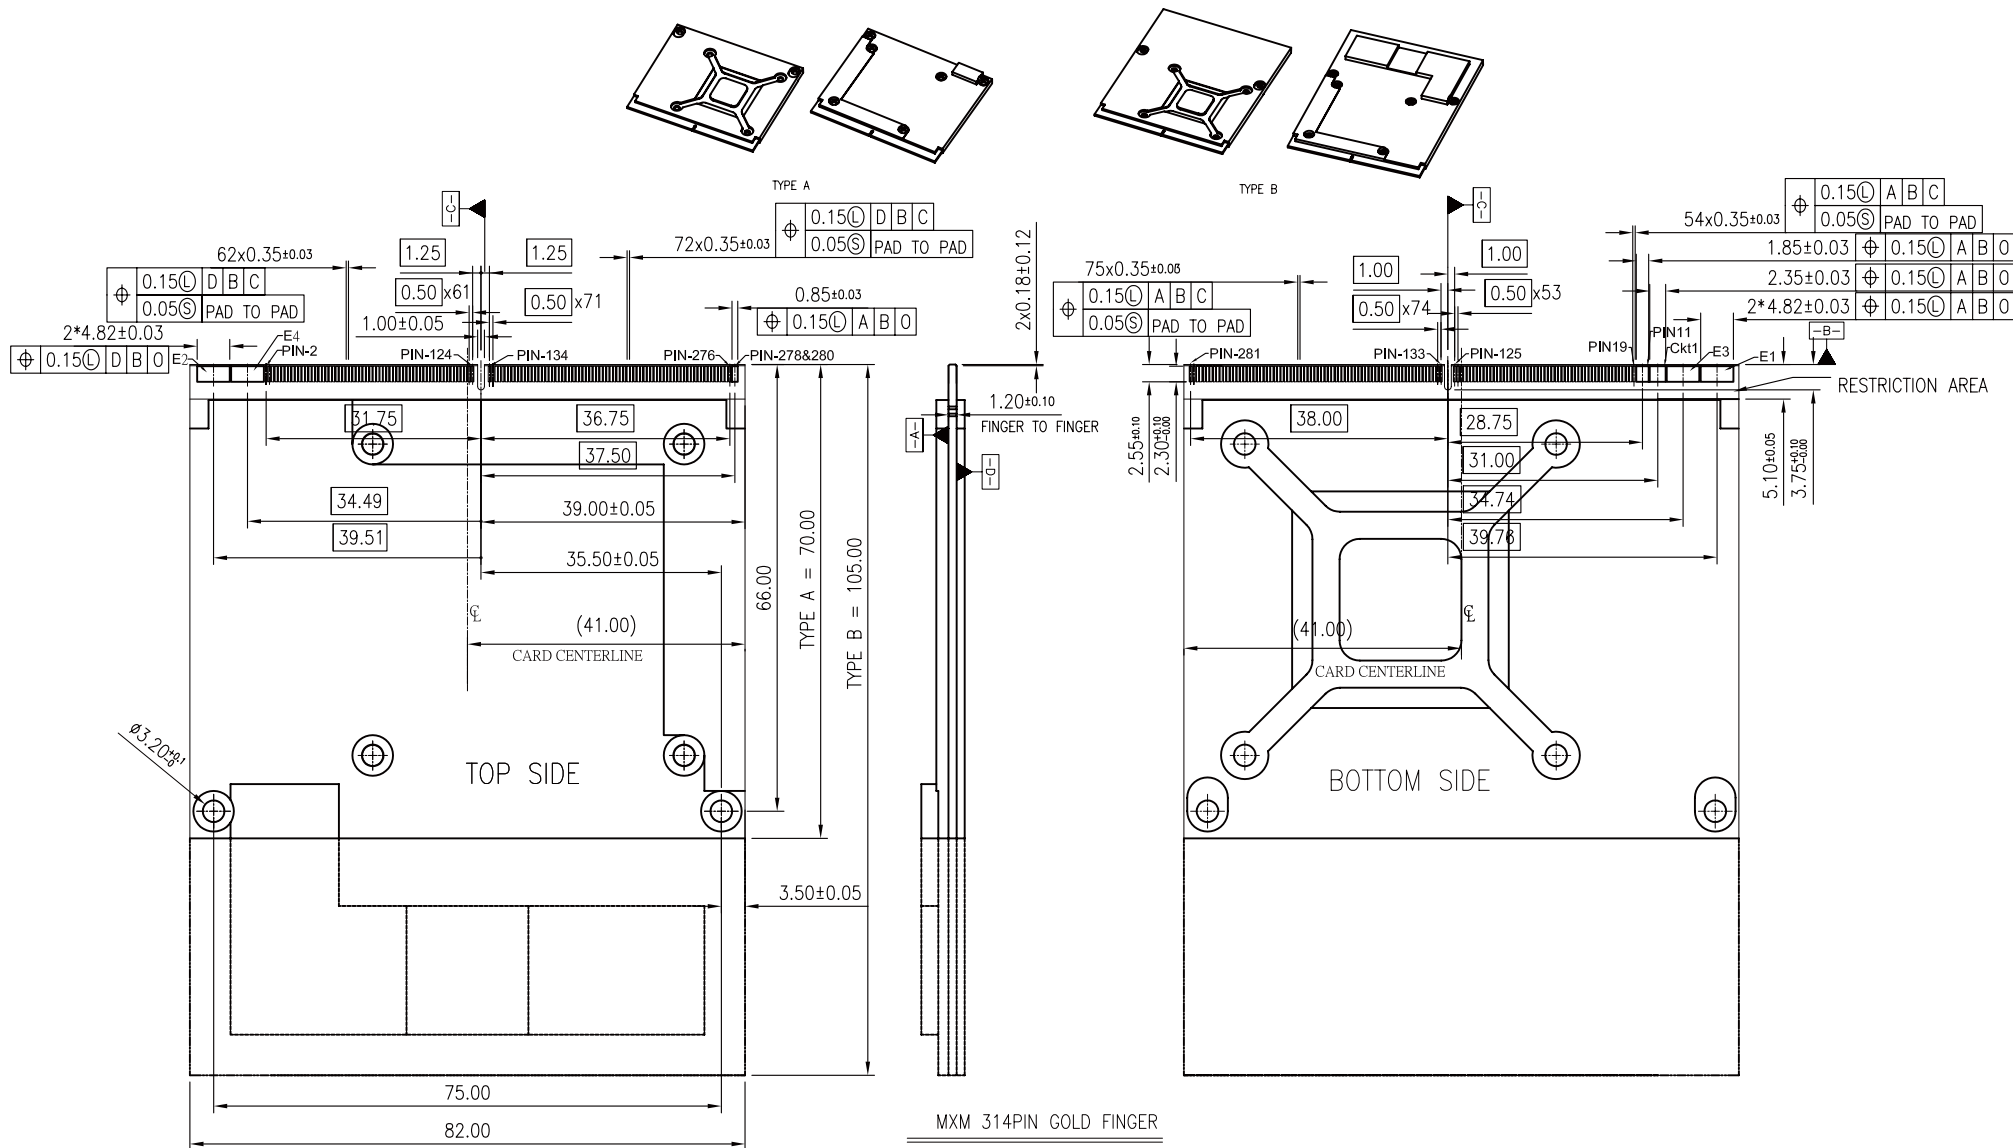

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MXM-W052EP2-165149-LF

SERIES

LEADFREE

314 WAY



EAR+POST

HIGH 5.2mm

90°SMT

DESCRIPTION: MXM 314 PINS 0.5mm PITCH EDGE CARD CONN.
SMT D/R R/A STD TYPE H=5.2mm (BTB H=2.7)

1. THICKNESS: 1.0 ± 0.05 mm.
MATERIAL:APET.

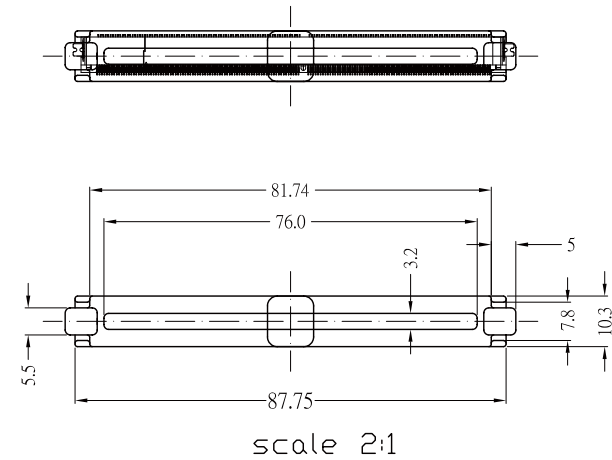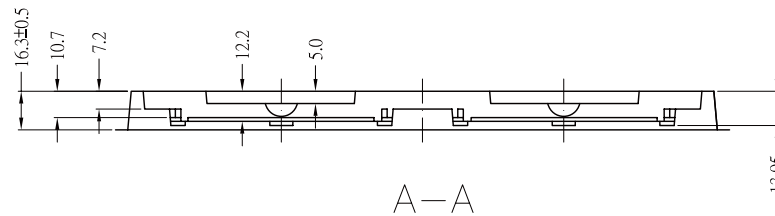

DESCRIPTION: PACKING