

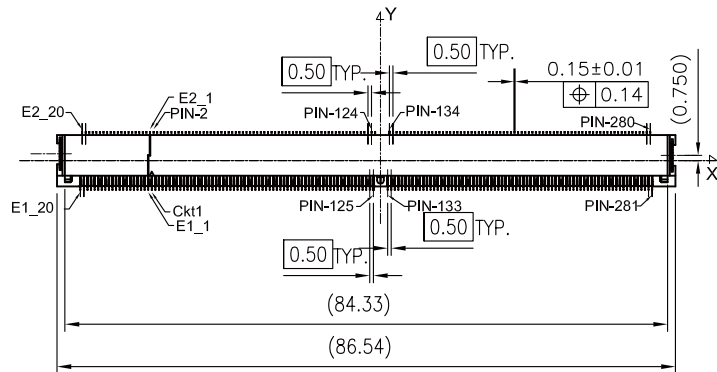
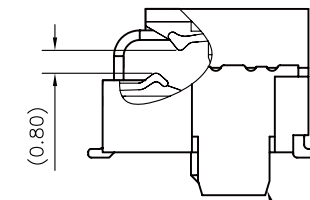




NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
 - 1.4 BOARD LOCK: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - UNDERPLATING: 50u" MIN. NICKEL OVERALL.
 - FINISH:GOLD 3u" MIN. ON CONTACT,GOLD FLASH ON SOLDER TAIL
 - 2.2 FITTING NAIL:
 - UNDERPLATING: 50u" MIN. NICKEL OVERALL.
 - FINISH:100~200u" MATT TIN OVER ALL
3. REFLOW SOLDER CAPABLE TO 260°C
4. ROHS COMPLIANT PRODUCT.
5. THE PCB WARPAGE : 0.05MAX.
6. THE PCB Coplanarity : 0.08MAX.(ex.86.54mm&CONN.LAYOUT AREA),

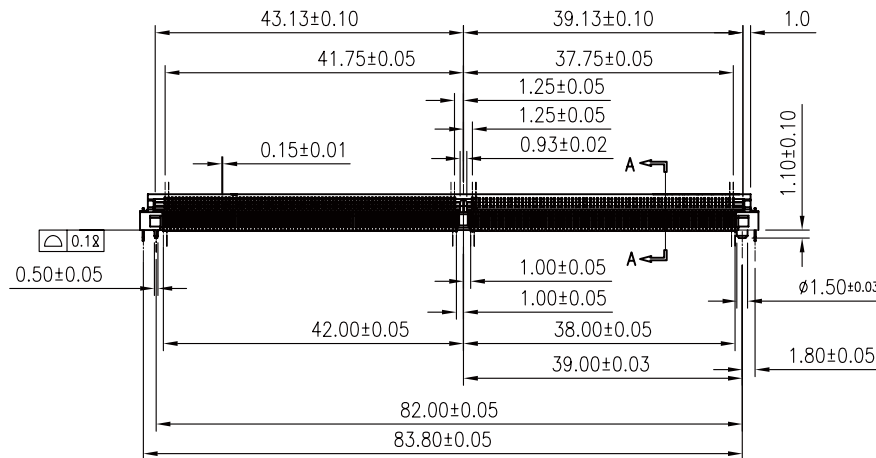

SECTION A-A(SCALE 4:1)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MXM-W052MP2-164149-LF

SERIES

314 WAY





METAL FOOT+POST

HIGH 5.2mm


90°SMT

LEADFREE

DESCRIPTION:

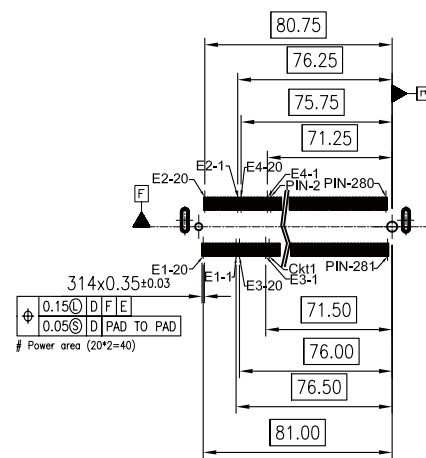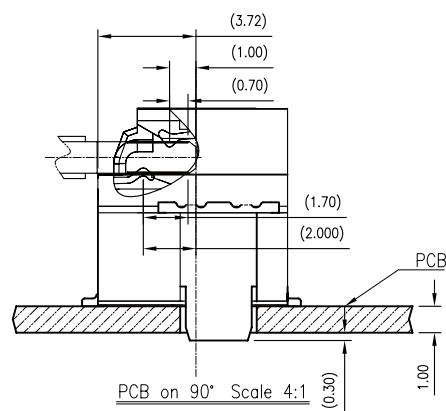

HIGH ELECTRICITY PER PIN LAYOUT

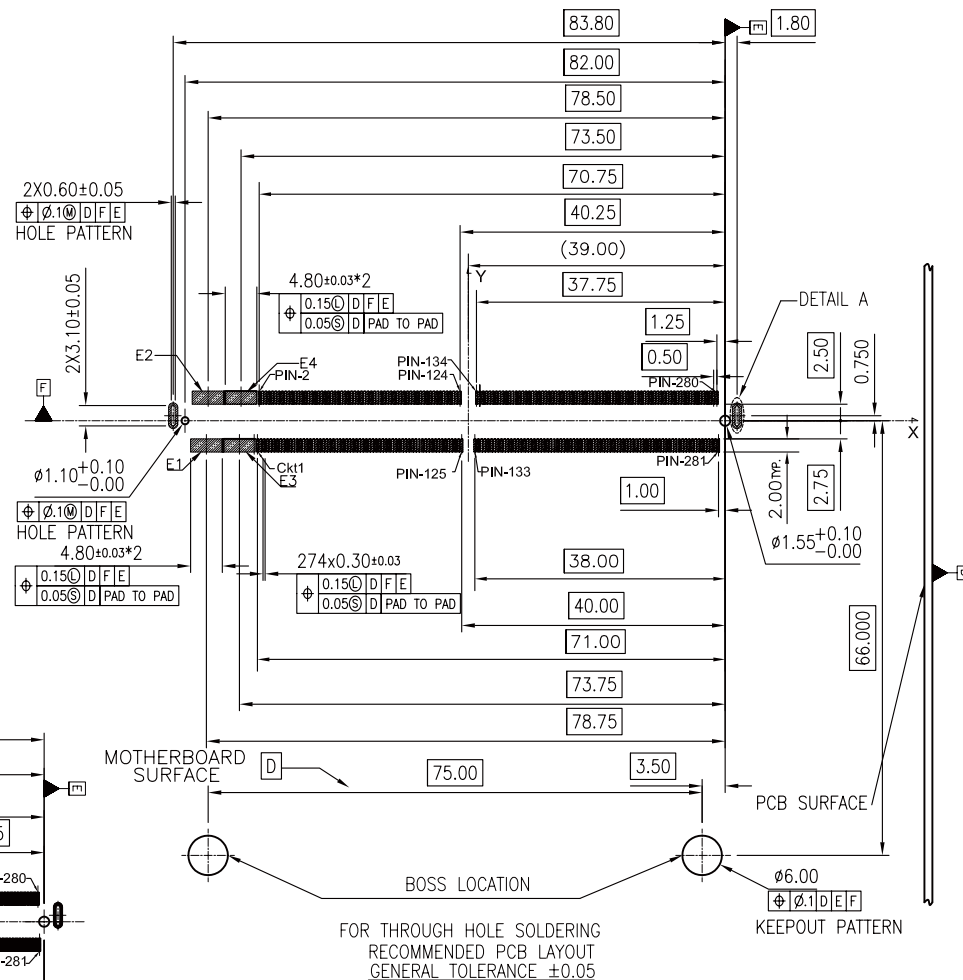

FOR THROUGH HOLE SOLDERING
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

照片框

SERIES
90°SMT
HIGH 5.2mm
METAL FOOT+POST
314 WAY
LEADFREE


DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

SIZE A4

PROJECTION 

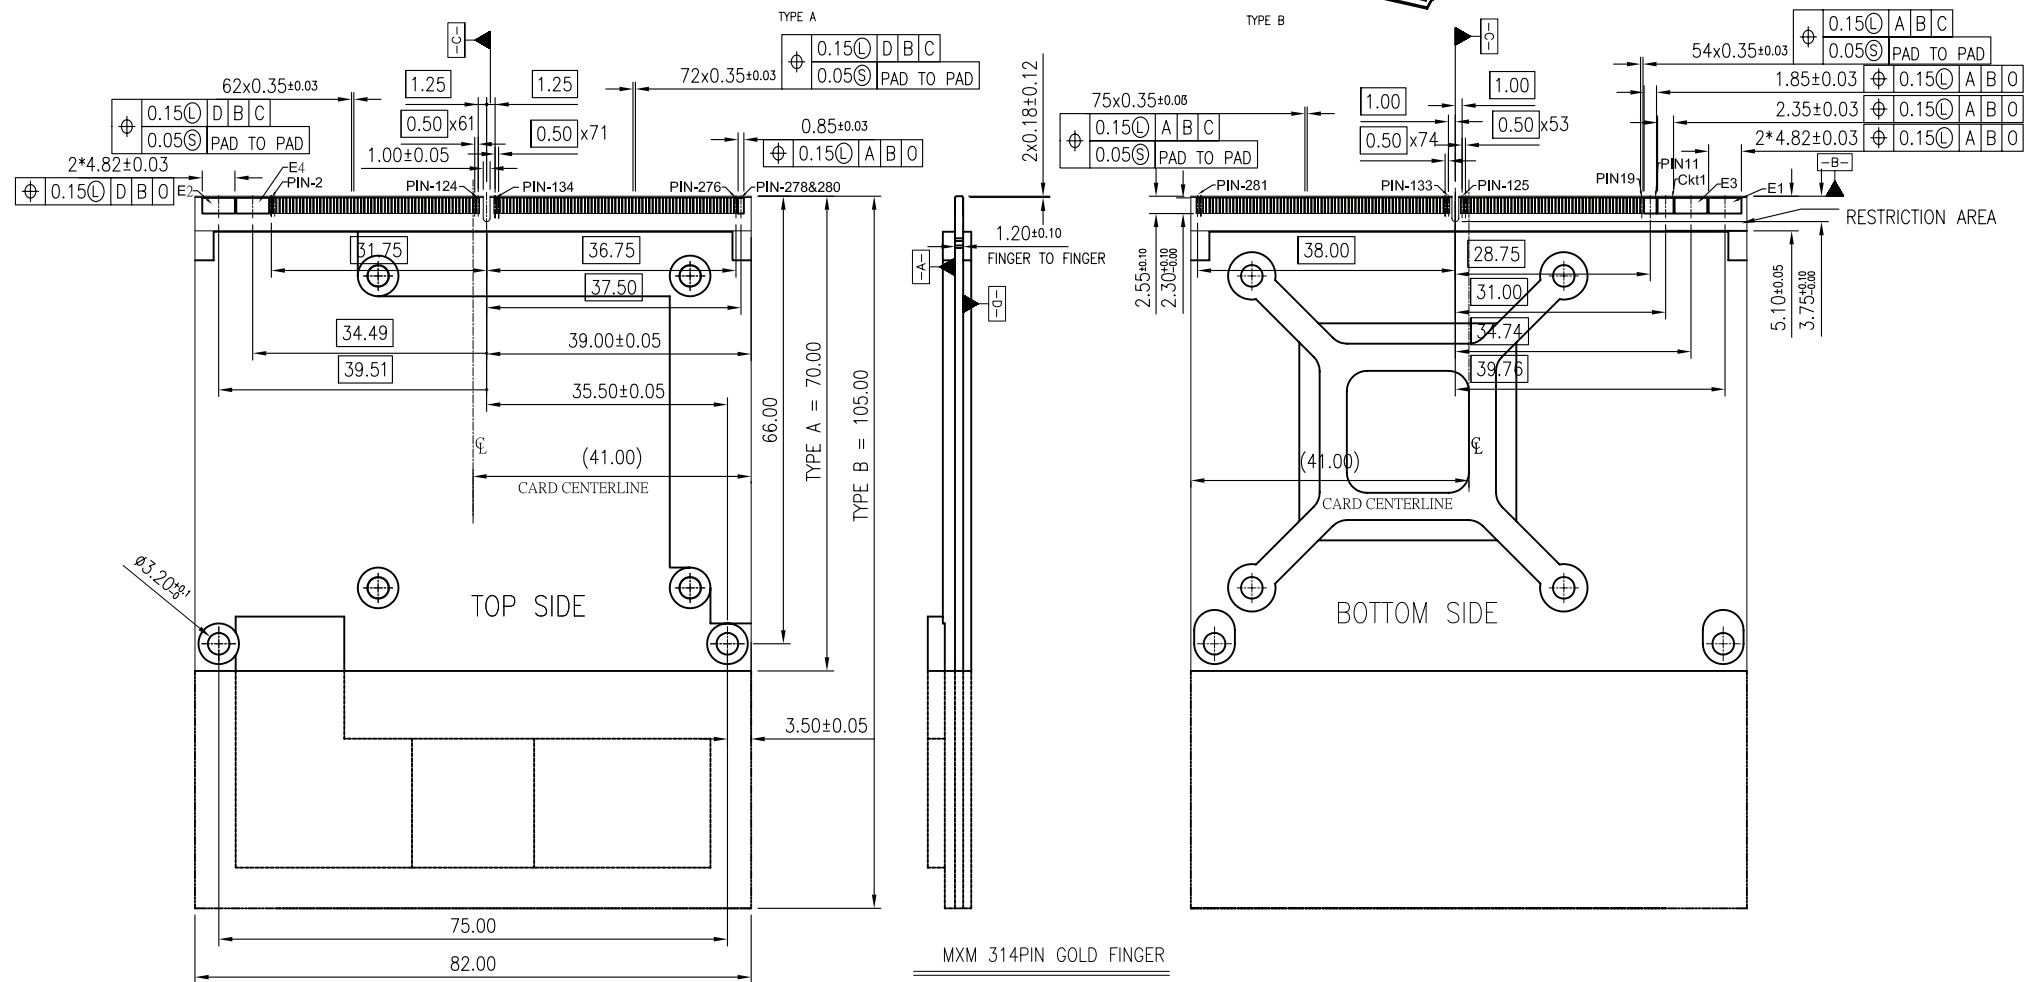

MXM 314PIN GOLD FINGER
MXM MAX 321 CONTACT LOCATION
314 USEABLE (7 LOST TO KEY)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MXM-W052MP2-164149-LF

SERIES

LEADFREE

314 WAY
METAL FOOT+POST
HIGH 5.2mm
90°SMT

DESCRIPTION:

MATERIAL:APET.



DESCRIPTION: PACKING