




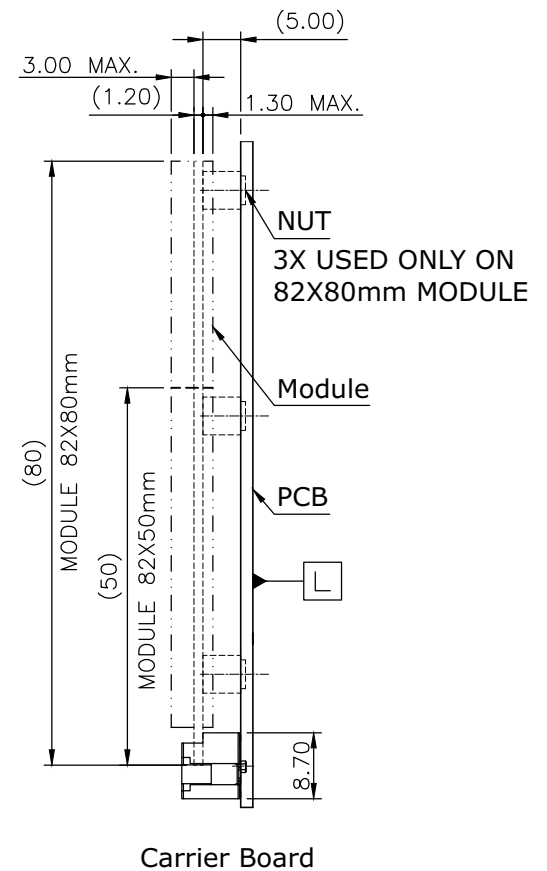

DESCRIPTION: MXM 3.0 314 pin for SMARC 0.5 Pitch, 7.8H, Standard Type, Reel

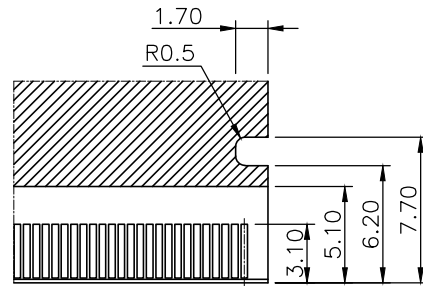

DETAIL A
SCALE 2.5:1






DETAIL B
SCALE 2.5:1

NOTES;(APPLIED TO SHEET 3)

OTHERWISE SPECIFIED.
2.P.C.BOARD THICKNESS APPLIES ACROSS TABS
AND INCLUDES PLATING AND/OR METALIZATION.

4.The common dimension for MXM3.0-TYPE A,B
when there is no special mention.

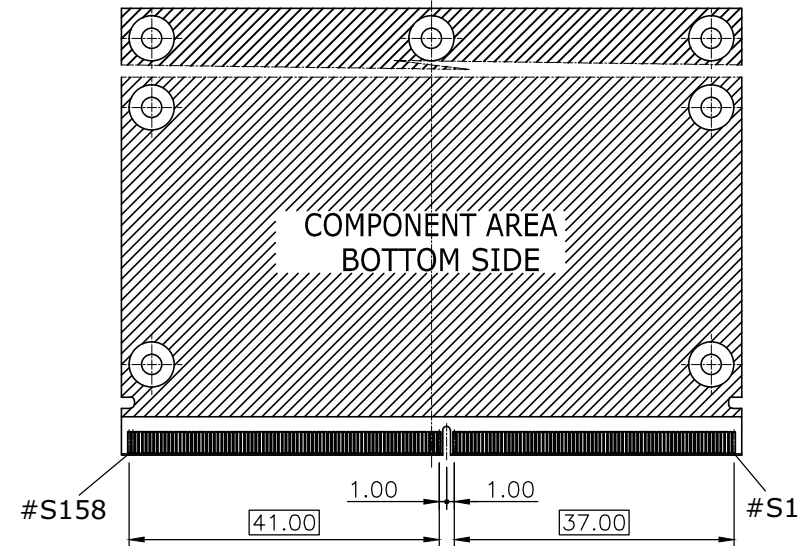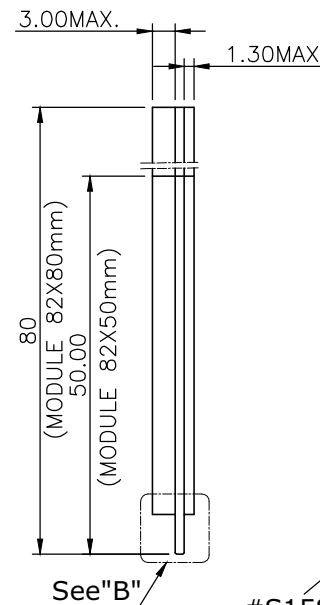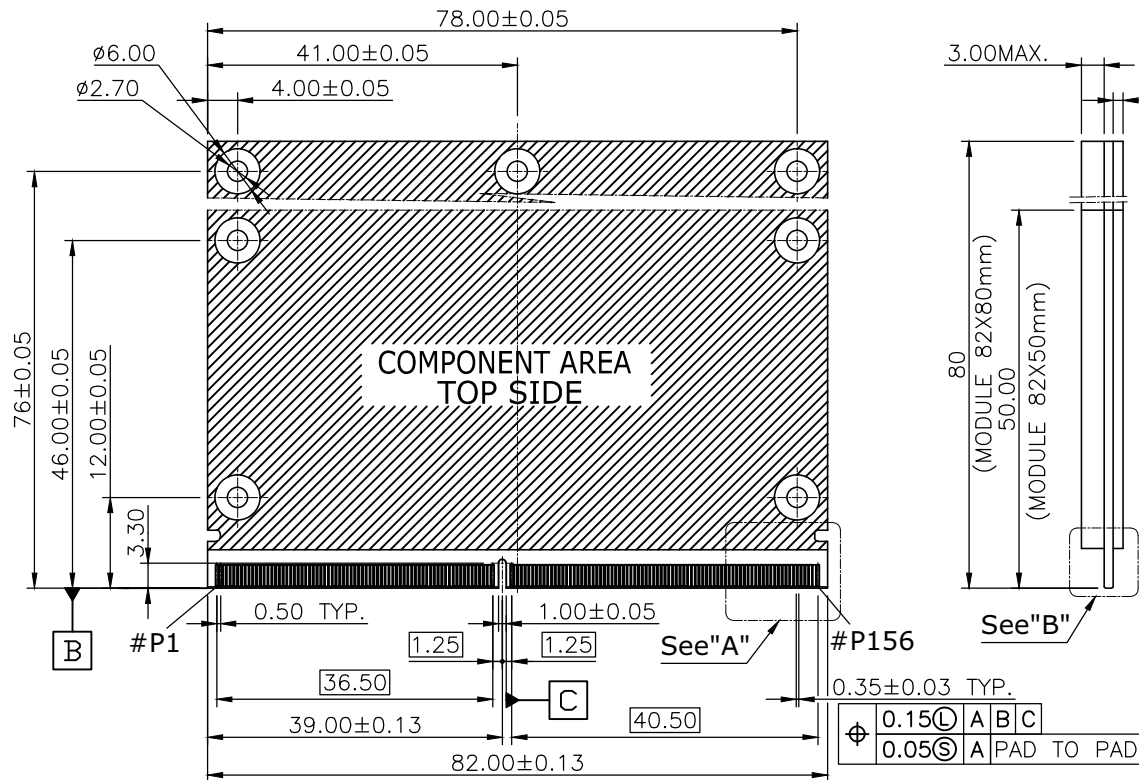

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MXM-W078EP2R-149165-LF

SERIES

REEL

EAR+POST





HIGH 7.8mm

90°SMT


314 WAY

LEADFREE

DESCRIPTION: MXM 3.0 314 pin for SMARC 0.5 Pitch, 7.8H, Standard Type, Reel

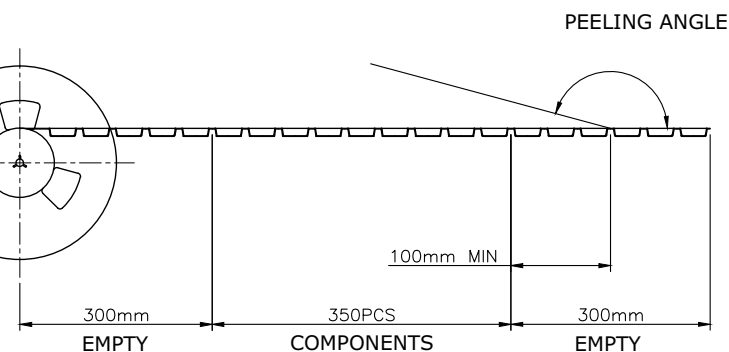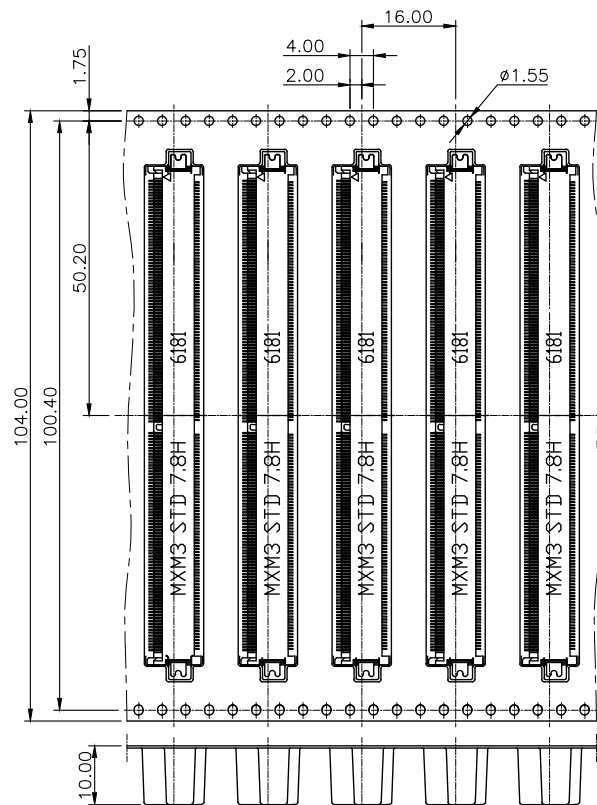

PULL OUT DIRECTION ➡

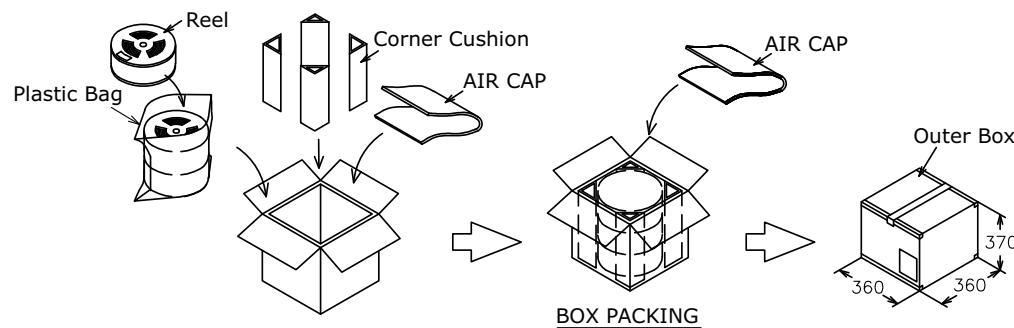

PACKAGING SPECIFICATION:

1. PACKING
- 1.1 Quantity:
 - 350Piece/ Reel
 - 1050 Piece/ Carton

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MXM-W078EP2R-149165-LF

SERIES

REEL

314 WAY

LEADFREE

REEL

EAR+POST

HIGH 7.8mm

90°SMT

DESCRIPTION: MXM 3.0 314 pin for SMARC 0.5 Pitch, 7.8H, Standard Type, Reel

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com