
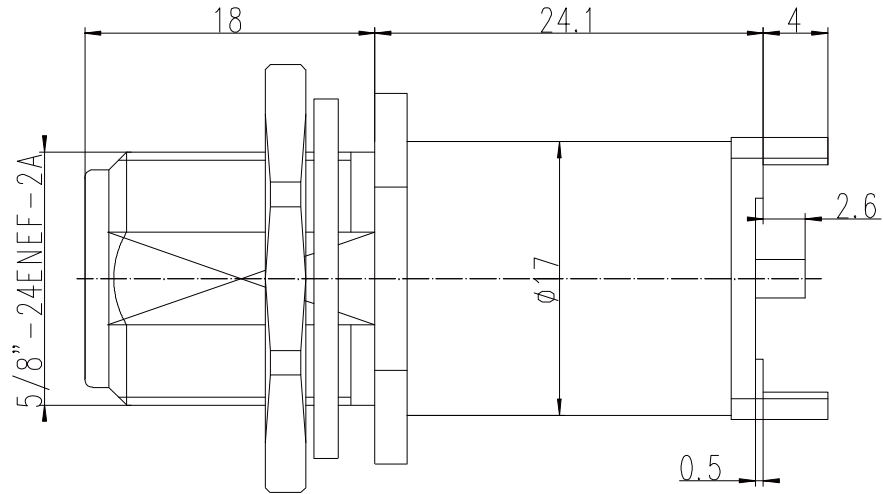
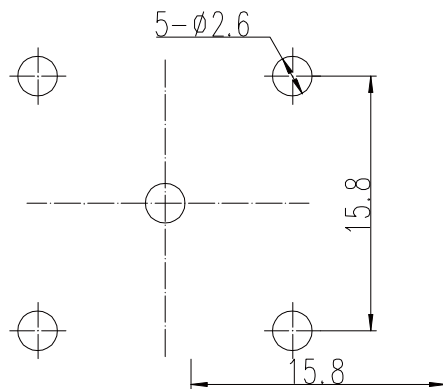


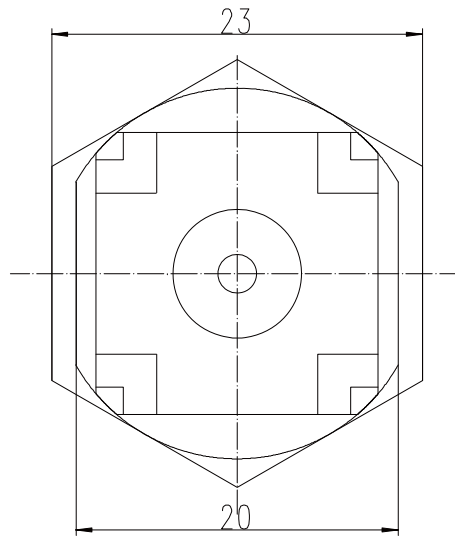

Impedance: 50 ohm

Frequency: 0-6G VSWR:1.3MAX

Insertion Loss: 0.2DB MAX

Power handling:500W

Contact Resistance

CenterConductor: 1.0 mΩ MAX

Out Conductor: 0.2 mΩ Max

Insulation Resistance: 5000 mΩ Min

Dielectric withstanding Voltage: 1500v

Cycles: 500 times

Material and Plating

Center Contact: Phosphor Brass with Gold plating

Body: Brass with Nickel plating

Insulator: PTFE

Temperature: -50°C --- +80°C

5	NUT	BRASS	NIKEL	1
4	WASHER	IRON	NIKEL	1
3	PIN	Phosphor Brass	GOLD	1
2	DIELECTRIC	TEFLON	NONE	1
1	BODY	BRASS	NIKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

0.5-5 =±0.2
5-30 =±0.4
30-120 =±0.6
120-315 =±1
315-1000 =±1.6
1000-2000 =±2.4

照片框

ORDER INFORMATION

N-JD24PBNW-50-LF
SERIES JACK DIP 180° HIGH24.1mm
LEADFREE 50 OHM
NUT BACK
WASHER PANEL

DESCRIPTION: