

4	O-RING	RUBBER	1	NATURAL
3	CONTACT PIN	P-bronze	1	SEE TABLE
2	INSULATOR	TEFLON	1	NATURAL
1	BODY	BRASS	1	COPPER-TIN-ZINC PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

ELECTRICAL

1. FREQUENCY RANGE: DC-11 GHz
2. WORKING VOLTAGE: 1000V
3. IMPEDANCE: 50 OHM
4. CONTACT RESISTANCE:
CENTRE CONTACT: <=1mΩ
5. INSULATION RESISTANCE: > 5000mΩ
6. Dielectric withstanding Voltage >=2500v
7. DURABILITY: 500 CYCLES Min.
8. TEMPERATURE RANGE:-40°C TO +155°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4


0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

ANGLES ±5°

P PROJECTION



ORDER INFORMATION

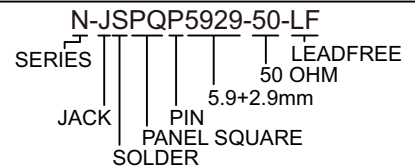

DESCRIPTION: N JACK PANEL RECEPTACLE