

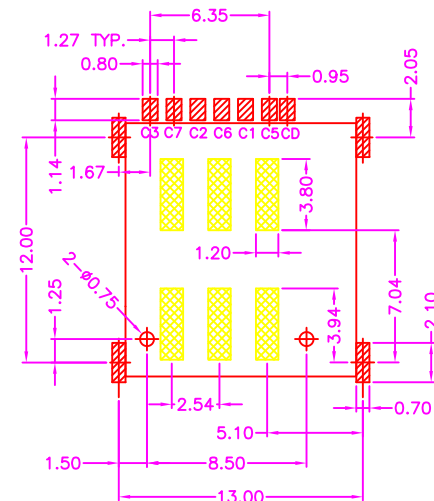
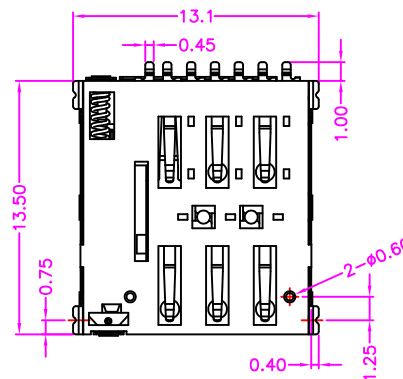


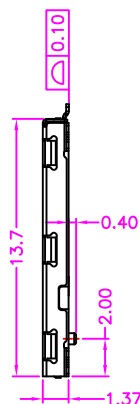

PAD AREA  
 KEEP OUT AREA

P.C.B LAYOUT  
TOP VIEW ±0.05


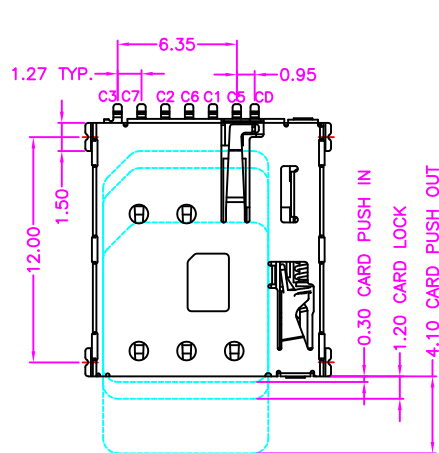


## MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)  
 SHELL: STAINLESS STEEL, NICKEL PLATING  
 SOLDER PAD: STAINLESS STEEL, GOLD FLASH  
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

## SPECIFICATION

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 100m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

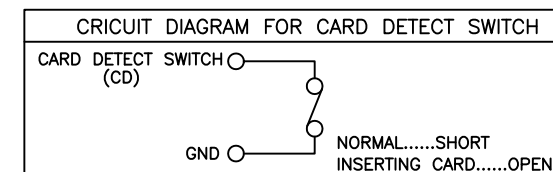

| SIM pin Assignment |      |
|--------------------|------|
| PIN#               | Name |
| C1                 | VCC  |
| C2                 | RST  |
| C3                 | CLK  |
| C5                 | GND  |
| C6                 | VPP  |
| C7                 | I/O  |

RoHS Compliant

TOLERANCES ARE

**PCB CONNECTORS**  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION






NASCP-W08PAR-06-LF

SERIES

SERIES

LEADFREE  
 06WAY  
 REEL  
 CLOSED TYPE  
 POST TO POST 8.5mm  
 90°SMT

DESCRIPTION: NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.35mm

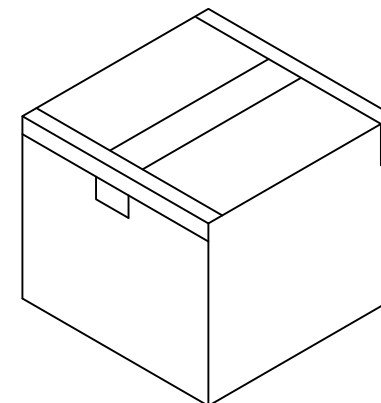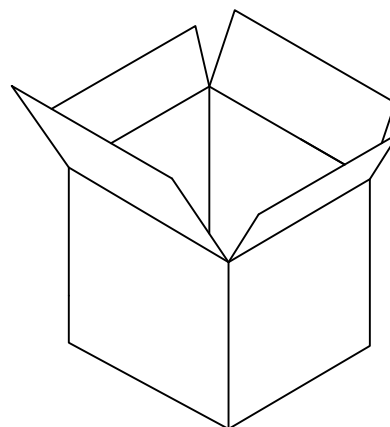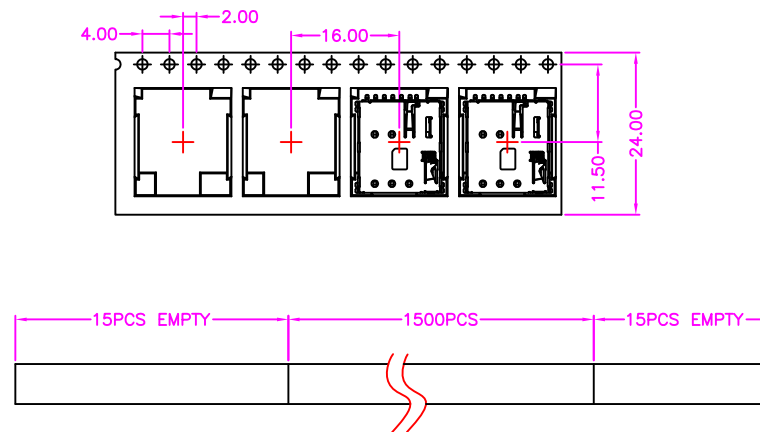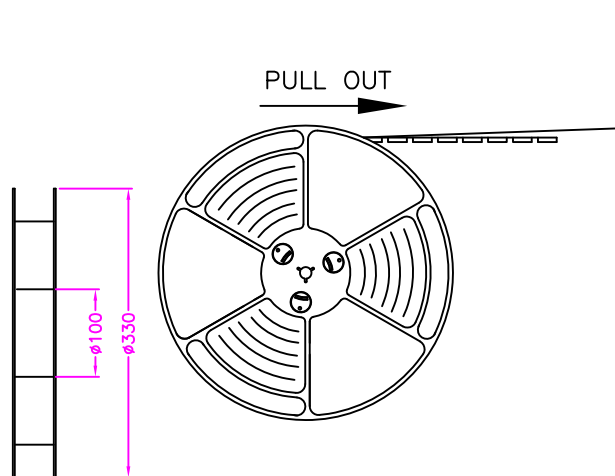

NOTE: 1500PCS/ REEL, 15000PCS/ 10 REEL/ CARTON

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

NASCP-W08PAR-06-LF

SERIES

SERIES

LEADFREE  
06WAY  
REEL  
CLOSED TYPE  
POST TO POST 8.5mm  
90°SMT

DESCRIPTION: NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.35mm