


RECOMMENDED LAYOUT  
GENERAL TOLERANCE: ±0.05

SIM CARD PIN ASSIGNMENT

PIN	ASSIGNMENT
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

NO.	PART NAME	DESCRIPTION
3	SHELL	Stainless Steel, gold flash on tail area under nickel plating
2	TERMINAL	Phosphor Bronze, 10u" selective gold under nickel plating
1	HOUSING	LCP, UL94V-0, Black

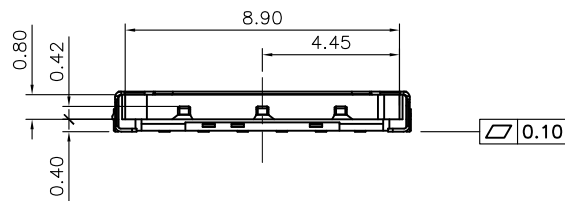

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.50  
.XX ± 0.25  
.XXX ± 0.12  
ANG ±

PJECTION

照片框

ORDER INFORMATION

NASCT-W0012X-06-LF

SERIES

LEADFREE  
06WAY  
NON POST  
HIGH 1.25mm  
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 6P Nano SIM Socket, Push-Pull Type, 1.2H