


SIM pin assignment	
PIN#	Name
C1	VCC供電電壓
C2	RST重置
C3	CLK時鐘
C5	GND接地
C6	VPP程序電壓
C7	I/O輸入輸出

- NOTES:
- MATERIAL:
    - INSULATOR: LCP UL94V-0;BLACK.
    - TERMINAL:COPPER ALLOY.
    - SHELL:STAINLESS STEEL
  - PLATING:
    - CONTACT: 30U" NI UNDERPLATED OVERALL  
G/F PLATED ON CONTACT AREA & SOLDER AREA
    - SHELL: PLATED 30U" NI OVERALL,G/F PLATED ON SOLDER AREA  
Shell: G/F PLATED ON SOLDER AREA,NI PLATED OVERALL
  - Electrical:
    - CURRENT RATING :0.5A
    - VOLTAGE RATING :30V DC
    - AMBIENT TEMPERATURE RANGE :-20°C~+60°C
    - STORAGE TEMPERATURE RANGE :-40°C~+70°C
    - AMBIENT HUMIDITY RANGE :95% R.H. MAX.
    - CONTACT RESISTANCE:100MΩ MAX.
    - INSULATION RESISTANCE:1000MΩ MIN./500VDC
    - MATING CYCLES:5,000 INSERTIONS
    - REFLOW PEAK TEMP.:260°C ±5°C, 3~5 S
    - MATING CYCLES:3,000 INSERTIONS MIN

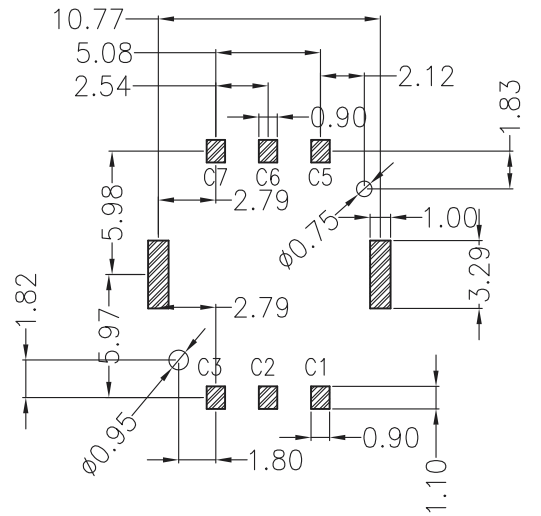

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司  
www.morethanall.com

DRAWING BY CY	X, ±
CHECKED BY GENIUS	.X ± 0.30
UNIT / mm	.XX ± 0.20
SCALE 1 : 1	.XXX ± 0.10
DATE	ANG ±
SIZE A4	PJECTION



ORDER INFORMATION

NASCT-W1113P-06-LF  
SERIES | | | | LEADFREE  
| | | | 06WAY  
| | | | POST  
| | | | HIGH 1.35mm  
| | | | PAD TO PAD 11.0mm  
| | | | 90°SMT

DESCRIPTION: Nano SIM POST 1.35PUSH-PULL