


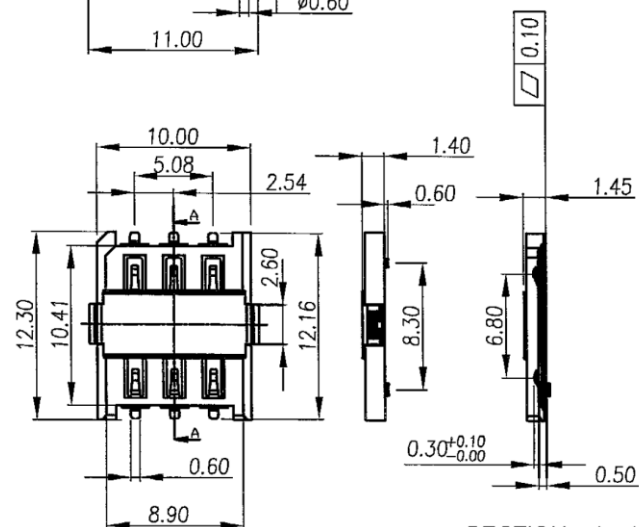
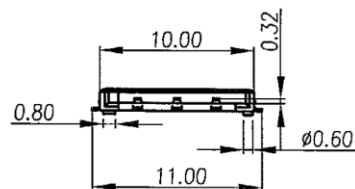


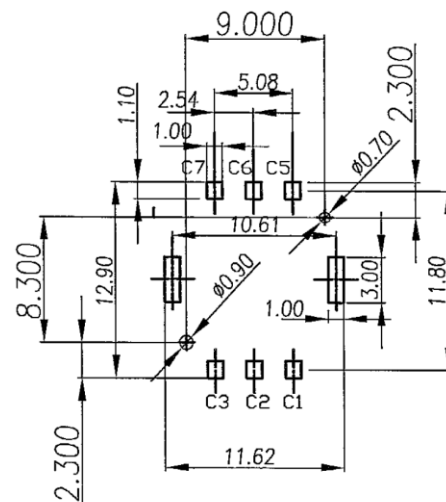

SECTION: A-A



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05



Notes:

1.Material:

Housing: LCP 30%GF, UL94V-0, Black
Contact : Phosphor Bronze, T=0.15mm
Shell: SUS201-H, T=0.15mm

2.Plating:

Contact:

Contact Area: 3U" GOLD PLATED
Solder Area: G/F Gold
Underplating: Ni overall 50u" Min.

Shell:


Solder Area: G/F Gold
Underplating: Ni overall 50u"

3.Mechanical:

Life cycles: 5000.

4.Electrical:

Voltage Rating: 30V AC RMS
Current Rating: 0.5A AC RMS Max
Operating Temperature: -20°C to $+80^{\circ}\text{C}$
Dielectric Withstanding Voltage: 100V AC (60Sec Min)
Insulation Resistance: 100MQ Min
Contact Resistance: 30m Ω Max

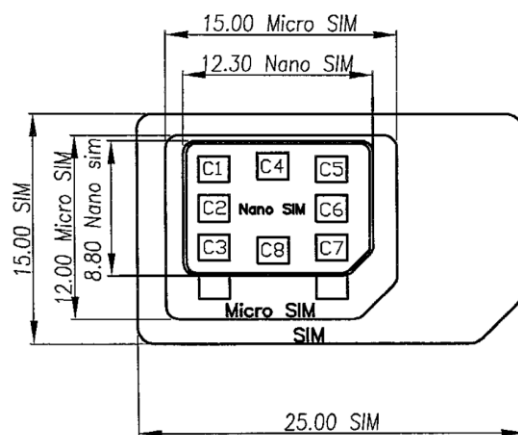

Nano SIM Card
REFERENCE DATA

C1 --> VCC
C2 --> RST
C3 --> CLK

C5 --> GND
C6 --> VPP
C7 --> I/O

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$



ORDER INFORMATION

NASCT-W1114P-06-LF

SERIES | | | | LEADFREE
| | | | 06WAY
| | | | POST
| | | | HIGH 1.40mm
| | | | PAD TO PAD 11.8mm
| | | | 90°SMT

DESCRIPTION: